



EMC TEST REPORT
For
NINGBO ENERGYLUX OPTOELECTRONICS
TECHNOLOGY CO.,LTD

Light-Control Sensor
(Photocell)

Test Model: ES-G02

Prepared for..... : NINGBO ENERGYLUX OPTOELECTRONICS TECHNOLOGY CO.,LTD
Address..... : No. 3, Xinyuan 3 Road, Binhai Industrial Zone, Xidian Town, Ninghai County, Ningbo City, Zhejiang Province.
Prepared for..... : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.
Address..... : 101-201, No.39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China
Tel : (+86)755-29871520
Fax : (+86)755-29871521
Web : www.LCS-cert.com
Mail : webmaster@lcs-cert.com
Date of receipt of test sample..... : November 04 , 2022
Number of tested samples..... : 1
Serial number..... : Prototype
Date of Test..... : November 04, 2022 - November 09, 2022
Date of Report..... : November 09, 2022



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



EMC TEST REPORT EN IEC 55015:2019+A11:2020 Emission - Electrical lighting and similar equipment EN 61547:2009 Equipment for general lighting purposes - EMC immunity requirements	
Report Reference No.....	LCSB092422135E
Date of issue.....	November 09, 2022
Testing Laboratory Name.....	Shenzhen Southern LCS Compliance Testing Laboratory Ltd
Address.....	101-201, No.39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Test procedure.....	Full application of Harmonised standards ☒ Partial application of Harmonised standards ☐ Other standard testing method ☐
Applicant's name.....	NINGBO ENERGYLUX OPTOELECTRONICS TECHNOLOGY CO.,LTD
Address.....	No.3 , Xinyuan 3 Road , Binhai Industrial Zone , Xidian Town , Ninghai County , Ningbo City , Zhejiang Province.
Test specification:	
Standard.....	EN IEC 55015:2019+A11 :2020 EN IEC 61000-3-2 :2019+A1:2021 EN 61000-3-3 :2013+A1:2019+A2:2021 EN 61547:2009
Test Report Form No.....	SLCSEMC-2.3
TRF Originator.....	Shenzhen Southern LCS Compliance Testing Laboratory Ltd
Master TRF.....	Dated 2016-08
Shenzhen Southern LCS Compliance Testing Laboratory Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Equipment Under Test.....	Infrared Motion Sensor
Trademark.....	N/A
Test Model/Type.....	ES-G02 ES-G01 ES-G03 ES-G04A ES-G04B ES-G04C ES-G05A ES-G05B ES-G05C ES-G05D ES-G05E ESG06 ES-G07 ES-G08 ES-G09 ES-G10 ES-GL01 ES-NL01
Rating.....	220-240V~, 50/60Hz, 10A 1 200W for Incandescent lamp 3 00W for Energy saving lamp/ Led lamp
Results.....	PASS
Compiled by:	Supervised by:
Cindy Nie/ File administrators	Baron Wen/ Technique principal





EMC - TEST REPORT

Test Report No..... : LCSB092422135E

Applicant.....:	Ningbo Energylux Optoelectronics TECHNOLOGY Co. Ltd
Address.....:	No.3 , Xinyuan 3 Road , Binhai Industrial Zone , Xidian Town , Ninghai County , Ningbo City , Zhejiang Province.
Telephone.....:	/
Fax.....:	/
Manufacturer.....:	Ningbo Energylux Optoelectronics TECHNOLOGY Co. Ltd
Address.....:	No.3 , Xinyuan 3 Road , Binhai Industrial Zone , Xidian Town , Ninghai County , Ningbo City , Zhejiang Province.
Telephone.....:	/
Fax.....:	/
Factory.....:	Ningbo Energylux Optoelectronics TECHNOLOGY Co. Ltd
Address.....:	No.3 , Xinyuan 3 Road , Binhai Industrial Zone , Xidian Town , Ninghai County , Ningbo City , Zhejiang Province.
Telephone.....:	/
Fax.....:	/

The applicant and manufacturer information, product name, model, trademark and other information in this report are all provided by the applicant, and this laboratory is not responsible for verifying its authenticity.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





ENVIRONMENTAL CONDITIONS

The climatic conditions during the test are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. the climatic conditions during the test were in the following Limits:

Ambient temperature	15°C - 30°C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa - 106 kPa

Climate values will be recorded and recorded separately if specifically required in the base standard or application product/ product series standard .

POSSIBLE TEST CASE VERDICTS

Test cases does not apply to test object	N/A
Test object does meet requirement	P(Pass) / PASS
Test object does not meet requirement	F(Fail) / FAIL
Not measured	N/M

DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

☒ Indicate that the conditions, standards or equipment listed is applicable to this report / test / EUT.
☐ Indicate that the conditions, standards or equipment listed is not applicable to this report / test / EUT.

REVISION HISTORY

Revision	Issue Date	Revision Content	Revised by
000	November 09, 2022	Initial Issue	-

Remark:

000) : “ ---”



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TABLE OF CONTENTS

1. GENERAL INFORMATION.....	6
1 . 1 . General Description of The Item(s)	6
1 . 2 . Operating Mode(s) Used of Tests	7
1 . 3 . Support / Auxiliary Equipment for The EUT	7
1 . 4 . Description of Test Facility	7
2. STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
3. MEASURING DEVICES AND TEST EQUIPMENT	9
4. VERDICT SUMMARY SECTION	11
4 . 1 . Standard(s)	11
4 . 2 . Overview of Results.....	12
5. EMISSION TESTS	13
5 . 1 . Conducted Disturbance	13
5 . 2 . Radiated Disturbance (9KHz - 30MHz)	15
5 . 3 . Radiated Disturbance (30MHz - 1GHz).....	16
5 . 4 . Harmonic Current	17
5 . 5 . Voltage Fluctuations & Flicker	18
6. IMMUNITY TESTS	19
6 . 1 . Performance Criteria.....	19
6 . 2 . Electrostatic Discharge	20
6 . 3 . Radio- Frequency Electromagnetic Fields.....	21
6 . 4 . Electrical Fast Transient / Burst.....	22
6 . 5 . Injected Currents (Radio- Frequency Common Mode)	23
6 . 6 . Surge.....	24
6 . 7 . Voltage Dips and Short Interruptions	25
ANNEX A - TEST RESULTS	26
ANNEX B - TEST PHOTOS	42
ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT	42



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China .
Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert. com| Web:www. lcs-cert.com.

Scan code to check authenticity.



1 . GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF THE ITEM(S)

Equipment Under Test	Infrared Motion Sensor
Test Model/ Type	Light- Control Sensor (Photocell)
Additional Models/ Type	Light- Control Sensor (Photocell)
Description of Model difference	The appearance, structure and interior of all models are the same except for the model name
Rating	220-240V~ , 50/60Hz, 10A, 1200W for Incandescent lamp, 300W for Energy saving lamp/ Led lamp.
Mounting position	☐ Table top equipment ☐ Wall / Ceiling mounted equipment ☐ Floor standing equipment ☐ Hand- held equipment ☒ Other
Non- restricted ELV lamps	☐ Yes ☒ No



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



1.2. OPERATING MODE(S) USED OF TESTS

During the tests, the following operating mode(s) has(have) been used.

Operating Mode	Operating Mode description	Used for testing	
		Emission	Immunity
1	Lighting on mode	☒	☒
2	Maximum light	☐	☐
3	Minimum light	☐	☐
4	Full load	☐	☐

1.3. SUPPORT / AUXILIARY EQUIPMENT FOR THE EUT

EUT has been tested using the following auxiliary equipment :

Auxeq	Model/ Type	Manufacturer	Supplied by
--			

1.4. DESCRIPTION OF TEST FACILITY

Test Location 1	Shenzhen Southern LCS Compliance Testing Laboratory Ltd . 101 -201 , No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China. CNAS Registration Number is L10160 .
Test Location 2	Shenzhen LCS Compliance Testing Laboratory Ltd. 101 , 201 Building A and 301 Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, Guangdong, China . NVLAP Accreditation Code is 600167-0 . CNAS Registration Number is L48 95 .
Date of receipt of test item	November 04 , 2022
Date(s) of performance of test	November 04 , 2022 - November 09 , 2022

Note: Radio- Frequency Electromagnetic Field (RS) Test Subcontract to Shenzhen LCS Compliance Testing Laboratory Ltd for Testing.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



2 . STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate . the reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. the measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 “ Specification for radio disturbance and immunity measuring apparatus and methods - Part 4 : Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/ IEC 1 7 0 2 5 . Furthermore, component and process variability of devices similar to that tested may result in additional deviation. the manufacturer has the sole responsibility of continued compliance of the device.

Measurement	Uncertainty (U_{lab})	Uncertainty (U_{cisp})
Conducted disturbance (9kHz - 150kHz)	± 1.40 dB	± 4.0 dB
Conducted disturbance (150kHz - 30MHz)	± 2.80 dB	± 3.6 dB
Magnetic field disturbance (9kHz - 150kHz)	± 3.46 dB	-
Magnetic field disturbance (150kHz - 30MHz)		
Radiated disturbance (9kHz - 30MHz)	± 3.12 dB	N/A
Radiated disturbance (30MHz - 200MHz)	± 4.66 dB	± 5.2 dB
Radiated disturbance (200MHz - 1GHz)	± 4.64 dB	± 5.0 dB

Supplementary information:

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95% .



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@ lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



3 . MEASURING DEVICES AND TEST EQUIPMENT

CONDUCTED DISTURBANCE

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2022-05-05	2023-05-04
2	10 dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2022-05-05	2023-05-04
3	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2022-05-05	2023-05-04
4	EMI Test Software	EZ	EZ EMC	N/A	/	/
5	Asymmetric Artificial Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2022-05-05	2023-05-04
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2022-05-05	2023-05-04
7	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

RADIATED DISTURBANCE (9 KHz - 30 MHz)

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	R&S	ESCI	101142	2022-05-05	2023-05-04
2	Triple-loop Antenna	EVERFINE	LLA-2	9161	2022-05-05	2023-05-04
3	EMI Test Software	EZ	EZ EMC	N/A	/	/
4	No. 2 shielded Room	CHENGYU	843	/	2020-06-16	2023-06-16

RADIATED DISTURBANCE (above 30 MHz)

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3 m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-06-15	2024-06-15
2	EMI Test Receiver	R&S	ESCI3	101010	2022-05-05	2023-05-04
3	Spectrum Analyzer	Agilent	N9020A	MY49100699	2022-05-05	2023-05-04
4	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2022-05-20	2025-05-19
5	Horn Antenna	ETS- LINDGREN	3115	00034771	2022-05-20	2025-05-19
6	EMI Test Software	EZ	EZ EMC	N/A	/	/
7	Controller	KGS	M4U480	/	/	/

HARMONIC CURRENT & FLICKER

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Harmonic Current And Flicker Test System	HTEC	AC2000A	/	2022-05-05	2023-05-04
2	Linear Variable Frequency Power Supply	HTEC	HHF-5010	/	2022-05-05	2023-05-04

ELECTROSTATIC DISCHARGE

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	TESEQ	NSG 437	1615	2022-03-21	2023-03-21

ELECTRICAL FAST TRANSIENT / BURST

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
------	----------------	--------------	-----------	------------	----------	----------



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



1	Electrical Fast Transient Generator	HTEC	HEFT51	162201	2022-05-05	2023-05-04
2	Coupling Clamp	HTEC	H3C	163701	2022-05-05	2023-05-04

SURGE

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Surge Generator	3CTEST	SG5006G	EC5581070	2022-05-05	2023-05-04
2	Coupling / decoupling Network	3CTEST	SGN-5010G	EC5591033	2022-05-05	2023-05-04

INJECTED CURRENTS (RADIO- FREQUENCY COMMON MODE)

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Conducted Susceptibility Generator	HTEC	CDG6000	126A140012016	2022-05-05	2023-05-04
2	Coupling Network	HTEC	CDN-M2+M3	A22/0382/2016	2022-05-05	2023-05-04
3	Attenuator 6 dB	HTEC	ATT6	HA1601	2022-05-05	2023-05-04
4	Electromagnetic clamp	LUTHI	EM101	35535	2022-05-05	2023-05-04

POWER FREQUENCY MAGNETIC FIELD

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Frequency Mag-Field Generator System	HTEC	HPFMF100	100-2400	2022-05-05	2023-05-04

VOLTAGEDIPS AND SHORT INTERRUPTIONS

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Voltage Dips and up Generator	HTEC	HPFS161P	162202	2022-05-05	2023-05-04

RADIO- FREQUENCY ELECTROMAGNETIC FIELDS

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2022-06-06	2023-06-05
2	RF POWER AMPLIFIER	OPHIR	5225R	1052	2022-06- 16	2023-06- 15
3	RF POWER AMPLIFIER	OPHIR	5273F	1019	2022-06- 16	2023-06- 15
4	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES- 148	2022-06- 19	2023-06- 18
5	Stacked Mikrowellen Log. - Per Antenna	SCHWARZBECK	STLP 9149	9149-484	2022-06- 19	2023-06- 18
6	Electric field probe	Narda S.TS./PMM	EP601	611WX80208	2022-06-06	2023-06-05





4 . VERDICT SUMMARY SECTION

This chapter present an overview of the standards and results . Refer the next chapter for details of measured test results and applied test levels.

4.1. STANDARD(S)

EN IEC 55015 :2019 +A11 :2020 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.

EN 61547: 2009 - Equipment for general lighting purposes — EMC immunity requirements .

EN IEC 61000-3-2 :2019+A1:2021 - Electromagnetic compatibility (EMC) Part 3-2 : Limits for harmonic current emissions (equipment input current ≤ 16 A per phase) .

EN 61000-3-3 :2013+A1:2019+A2:2021 - Electromagnetic compatibility (EMC) Part 3-3 : Limits for voltage changes, voltage fluctuations and flicker in public low- voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection .



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



4.2. OVERVIEW OF RESULTS

EMISSION TESTS - EN IEC 55015, EN IEC 61000-3-2, EN 61000-3-3		
Requirement - Test case	Limit	Verdict
Conducted Disturbance - electric power supply	Table 1, Table 4	PASS
Conducted Disturbance - wired network ports at other than power supply	Table 2, Table 3	N/A
Conducted Disturbance - local wired ports at other than electrical power supply interface of ELV lamp	Table 5, Table 6	N/A
Assessment of the enclosure port	---	---
Radiated Disturbance in the frequency range 9 kHz to 30 MHz	Table 8, Table 9	PASS
Radiated Disturbance in the frequency range 30 MHz to 1 GHz	Table 10	PASS
Harmonic Current	Clause 7	PASS
Voltage Fluctuations and Flicker ²	Clause 5	N/A
IMMUNITY TESTS - EN 61547		
Requirement - Test case	Basic Standard(s)	Verdict
Electrostatic Discharge	IEC/EN 61000-4-2	PASS
Radio-Frequency Electromagnetic Fields	IEC/EN 61000-4-3	PASS
Electrical Fast Transient / Burst	IEC/EN 61000-4-4	PASS
Surge	IEC/EN 61000-4-5	PASS
Injected Currents (Radio-Frequency Common Mode)	IEC/EN 61000-4-6	PASS
Power Frequency Magnetic Field ¹	IEC/EN 61000-4-8	N/A
Voltage Dips and Short Interruptions	IEC/EN 61000-4- 11	PASS

Supplementary information:

- 1) Only need to be applied to equipment containing components susceptible to magnetic fields.
- 2) According to EN 61000-3-3:2013+A1:2019+A2:2021 Clause A.2, Incandescent lamp luminaires with ratings less than or equal to 1000W and discharge and LED lamp luminaires with ratings less than or equal to 600W, are deemed to comply with the standard and are not required to be tested.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



5 . EMISSION TESTS

5.1. CONDUCTED DISTURBANCE

Standard	EN IEC 55015:2019+A11 :2020
Basic Standard(s)	EN 55016-2- 1

Disturbance voltage limits at the electric power supply interface

Frequency range [MHz]	Limit: Quasi- peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,009 - 0,05	110	N/A	200 Hz
0, 05 - 0, 15	90 - 80	N/A	200 Hz
0 , 15 - 0,5	66 - 56	56 - 46	9 kHz
0 ,5 - 5,0	56	46	9 kHz
5 ,0 - 30	60	50	9 kHz

- 1) At the transition frequency, the lower limit applies.
- 2) The limit decreases linearly with the logarithm of the frequency in the ranges 50 kHz to 150 kHz and 150 kHz to 0,5 MHz .
- 3) If the EUT is non-restricted ELV lamps, the limits add 26 dB .

Disturbance voltage limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi- peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0, 15 - 5,0	84 - 74	74 - 64	9 kHz
5,0 - 30	74	64	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0. 15 MHz to 0.5 MHz.
- 2) The disturbance voltage limits are derived for use with an artificial asymmetrical network (AAN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the measured interface.

Disturbance current limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi- peak [dB(μA)]	Limit: Average[dB(μA)]	IF BW
0, 15 - 5,0	40 - 30	30 - 20	9 kHz
5,0 - 30	30	20	9 kHz

- 1) The limits decrease linearly with the logarithm of the frequency in the range 0. 15MHz to 0.5 MHz.

Disturbance voltage limits at local wired ports: local wired ports other than electrical power supply interface of ELV lamp

Frequency range [MHz]	Limit: Quasi- peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0 , 15 - 5,0	80	70	9 kHz
5 ,0 - 30	74	64	9 kHz

- 1) At the transition frequency, the lower limit applies.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.

Test Setup for table-top

The diagram illustrates a table-top test setup. An Equipment Under Test (EUT) is placed on a table. It is connected to an Antenna Mounting Network (AMN) and an Antenna Assembly Network (AAN) via cables. The setup includes a vertical reference ground plane and a horizontal reference ground plane. Dimensions specified include 0.1 m for cable length, 0.8 m for the distance from the EUT to the ground plane, and 0.4 m for the distance from the ground plane to the reference plane. The AAN and AMN are bonded to a reference ground plane.

Test Setup for Floor standing

The diagram illustrates a floor-standing test setup. The EUT is mounted on a non-conductive support. It is connected to an AMN and an AAN via cables. The setup includes a vertical reference ground plane and a horizontal reference ground plane. Dimensions specified include 0.2 m for the distance from the EUT to the ground plane and 0.8 m for the distance from the ground plane to the reference plane. The AAN and AMN are bonded to a horizontal reference ground plane.

For Table-top, EUT shall be placed at (0 , 8 ± 0 , 05) m above the reference plane of the test site selected for measurement. for Floor standing, EUT shall be placed at (0 , 1 2 ± 0 , 04) m above the reference plane of the test site selected for measurement.

and connected to the AC mains through artificial mains network (LISN) . EUT is powered by V- type artificial power network, and the distance from LISN or ANN is 0 , 8 m. the part of the EUT power cord exceeding 0 , 8 m folds in parallel to form a 0 , 3 - 0 , 4 m eights harness.



1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



5.2. RADIATED DISTURBANCE (9KHz - 30MHz)


Standard	EN IEC 55015:2019+A11 :2020
Basic Standard(s)	EN 55016-2-3
Test method	Large Loop Antenna (LLA)

LLAS Radiated disturbance limits (2 m)

Frequency range [MHz]	Limit: Quasi- peak [dB(μA)]	IF BW
0 ,009 - 0,07	88	200 Hz
0 ,07 - 0, 15	88 - 58	200 Hz
0 , 15 - 3,0	58 - 22	9 kHz
3,0 - 30	22	9 kHz

- 1) At the transition frequency the lower limit applies.
- 2) Decreasing linearly with logarithm of the frequency .

Test configuration

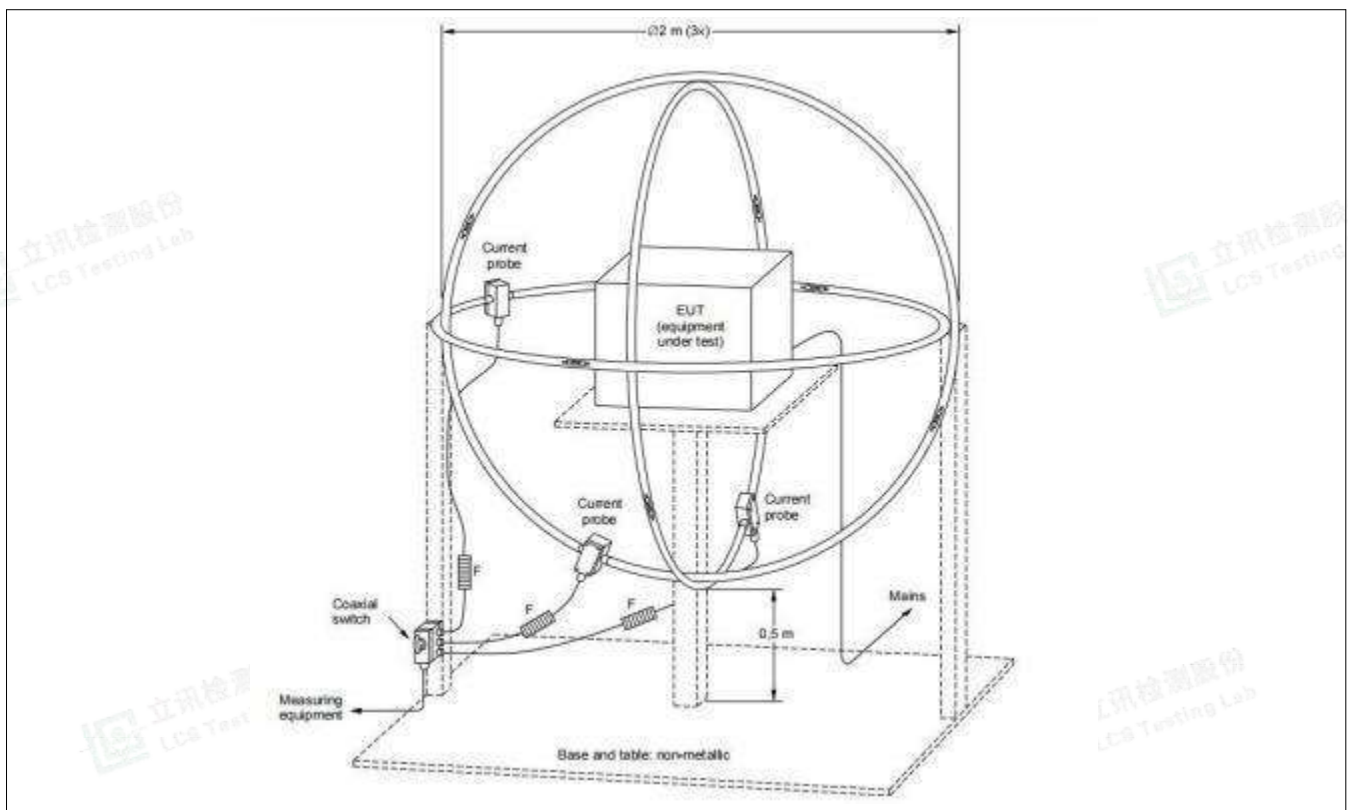

Test Procedure Description

The EUT is placed on a wood table in the center of a loop antenna. the induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.

Test Results refer to Annex A.2



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



5.3. RADIATED DISTURBANCE (30MHz - 1GHz)


Standard	EN IEC 55015:2019+A11 :2020
Basic Standard(s)	EN 55016-2-3
Test method	Semi Anechoic Chamber (SAC)

SAC Radiated disturbance limit

Frequency range [MHz]	Limit: Quasi- peak [dB(μV/m)]		IF BW
	3 m distance	10 m distance	
30 - 230	40	30	120 KHz
230 - 1000	47	37	120 KHz

1) At the transition frequency, the lower limit applies .
 2) Distance refers to the distance in meters between the measuring instrument antenna geometric center and the closed point of any part of the EUT.

Test configuration

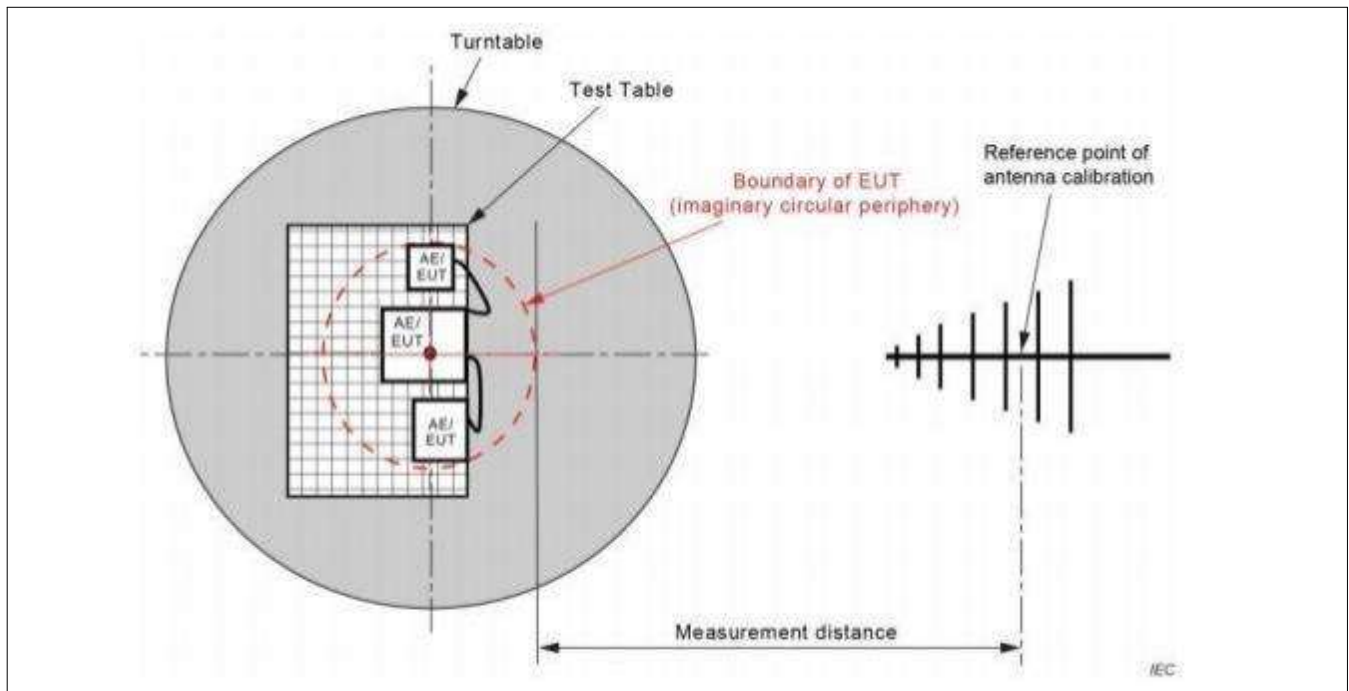

Test Procedure Description

The radiated disturbance test was conducted in a 3 m Semi Anechoic Chamber and conforming to CISPR 16-2-3. the EUT is placed on a turntable, which is 0.8 meter high above the ground. the turntable can rotate 360 degrees to determine the position of the maximum emission level. the EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. the antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Log-periodic Antenna (calibrated by Dipole antenna) is used as a receiving antenna. both horizontal and vertical polarization of the antenna is set on test.

Test Results refer to Annex A. 3



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.




5.4. HARMONIC CURRENT

Standard	EN IEC 61000-3-2 :2019+A1:2021	
Exclusions (For these categories of equipment, limits are not specified in the EN IEC 61000-3-2)	☐	Systems with nominal voltages less than 220V _{AC} (line-to-neutral)
	☐	Lighting equipment with rated power < 5 W
	☐	Equipment with rated power of ≤ 75 W (other than lighting equipment)
	☐	Professional equipment with a total rated power > 1kW
	☐	Symmetrically controlled heating elements with rated power ≤ 200 W
	☐	Independent dimmers for incandescent lamps with rated power ≤ 1kW

Classification		
☐	Class A	All equipment not specified as belonging to Class B, C or D
☐	Class B	Portable tools
☒	Class C	☒ Lighting equipment with active input power > 25W
		☐ Lighting equipment with active input power ≥ 5W and ≤ 25W
		☐ Table 3, column 2 (Power-related limits)
		☐ 3rd harmonic ≤ 86%, 5th harmonic ≤ 61% and waveform conditions
		☐ THD ≤ 70%, Harmonic:3rd ≤ 35%, 5th ≤ 25%, 7th ≤ 30%, 9th and 11th ≤ 20%, 2nd ≤ 5%
☐	Class D	Personal computers, television receivers, refrigerators and freezers having one or more variable-speed drives to control compressor

Test configuration

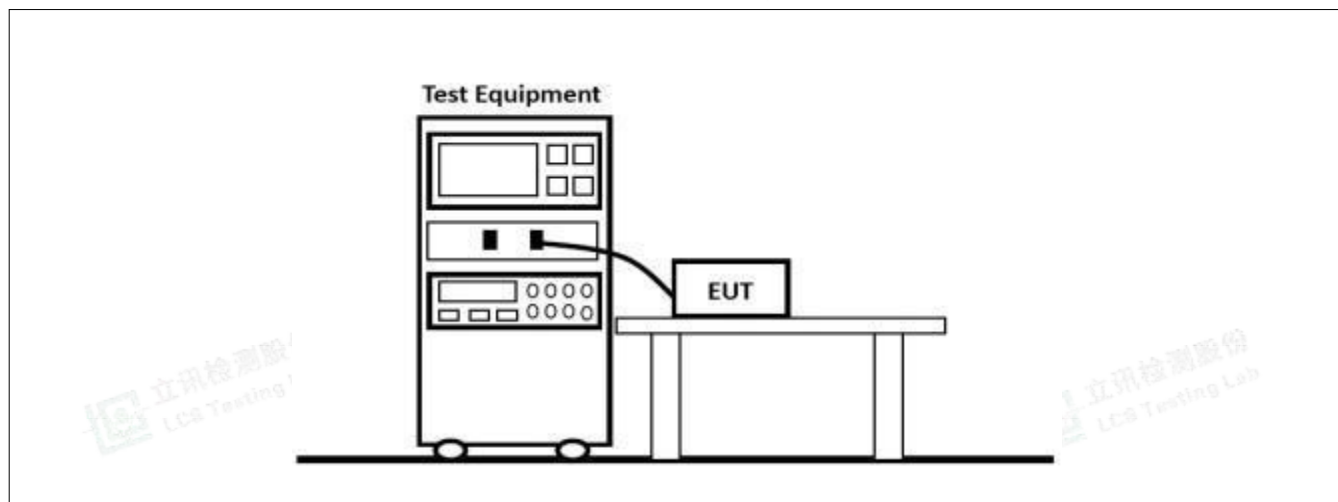

Test Results refer to Annex A.4



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.




5.5. VOLTAGE FLUCTUATIONS & FLICKER

Standard	EN 61000-3-3 :2013+A1:2019+A2:2021
----------	------------------------------------

Limit

P_{st} (Short term flicker)	☐	≤ 1	☒	Not applicable
P_{lt} (Long-term flicker)	☐	$\leq 0,65$	☒	Not applicable
T_{max} (Accumulated time)	☐	≤ 500 ms	☒	Not applicable
d_c (Relative voltage change)	☐	$\leq 3.3\%$	☒	Not applicable
d_{max} (Max. voltage change)	☐	$\leq 4\%$	☐	$\leq 6\%$
		$\leq 7\%$	☒	Not applicable

Test configuration

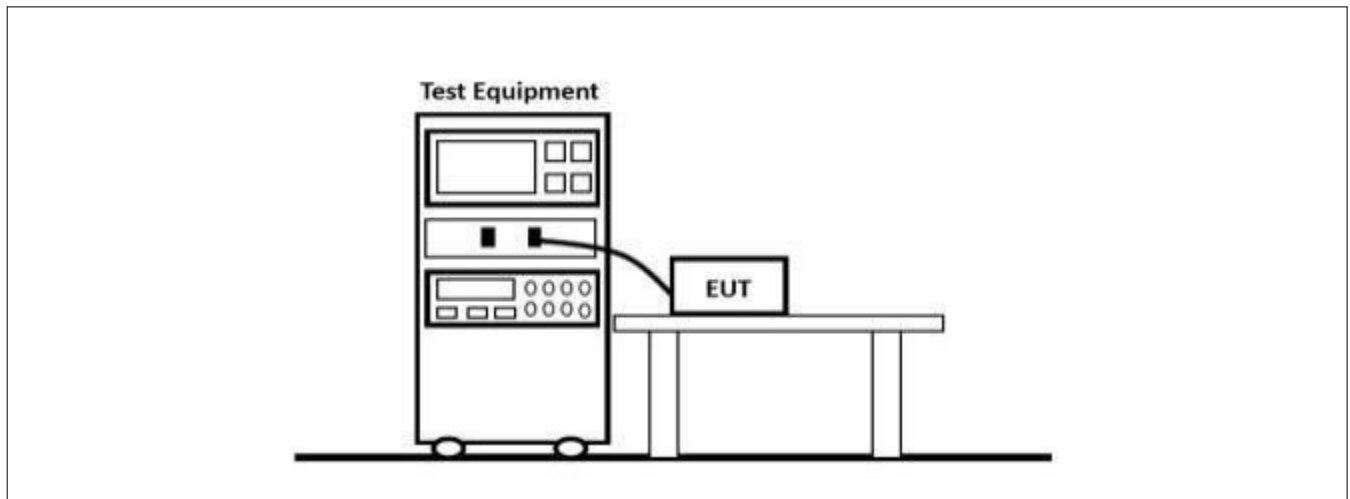

Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 0 1 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China .

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



6 . IMMUNITY TESTS

6.1. PERFORMANCE CRITERIA

Standard	EN 61547:2009
----------	---------------

The performance of lighting equipment shall be assessed by monitoring:

- the luminous intensity of the luminaire or of the lamp(s) .
- the functioning of the control in the case of equipment which includes a regulating control or concerns the regulating control itself.
- the functioning of the starting device, if any .

Performance criterion A: during the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: during the test, the luminous intensity may change to any value. after the test, the luminous intensity shall be restored to its initial value within 1 min. regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: during and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. after the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and / or operating the regulating control.

Electronic lighting equipment		Tests and performance criteria							
		5.2 (ESD)	5.3 (RS)	5.4 (PFMF)	5.5 (EFT)	5.6 (CS)	5.7 (Surge)	5.8 (Dips)	5.9 (Interruption)
☐	Self-ballasted lamps	B	A	B	B	A	C	C	B
☐	Independent auxiliaries	B	A	B	B	A	C	C	B ¹
☒	Luminaire including active electronic components	B	A	B	B	A	C	C	B ¹
☐	Luminaire for emergency lighting	B ²	A	B	B ²	A	B ²	See ³	See ³

Supplementary information:

- 1) For ballasts where the lamp is not able to restart within 1 min, due to the physical constraints of the lamp, performance criterion C applies .
- 2) Luminaires for emergency lighting shall be tested in both the normal and emergency mode of operation.
- 3) These tests do not apply as they are covered by the test in IEC 60598-2-22.
- 4) For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0,5 s.






6.2. ELECTROSTATIC DISCHARGE

Electrostatic discharge (ESD) is the result of accumulated static electricity from a person or object, for example, walking on a synthetic carpet. ESD can indirectly affect the operation of equipment or damage its electronic components through direct discharge or coupling. Both effects were simulated during the test. Contact discharge is the preferred test method. Twenty discharges (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure (terminals are excluded). Air discharges shall be used where contact discharges cannot be applied. Discharges shall be applied on the horizontal or vertical coupling planes.

Requirements

Standard	EN 61547:2009							
Basic standard	EN 61000-4-2							
Port under test	Enclosure							
Contact discharge	☒	± 2 kV	☒	± 4 kV	☐	± 8 kV	☐	± 15 kV
Air discharge	☒	± 2 kV	☒	± 4 kV	☒	± 8 kV	☐	± 15 kV
Number of discharges	≥ 10 per polarity with ≥ 1 sec interval							

Test configuration

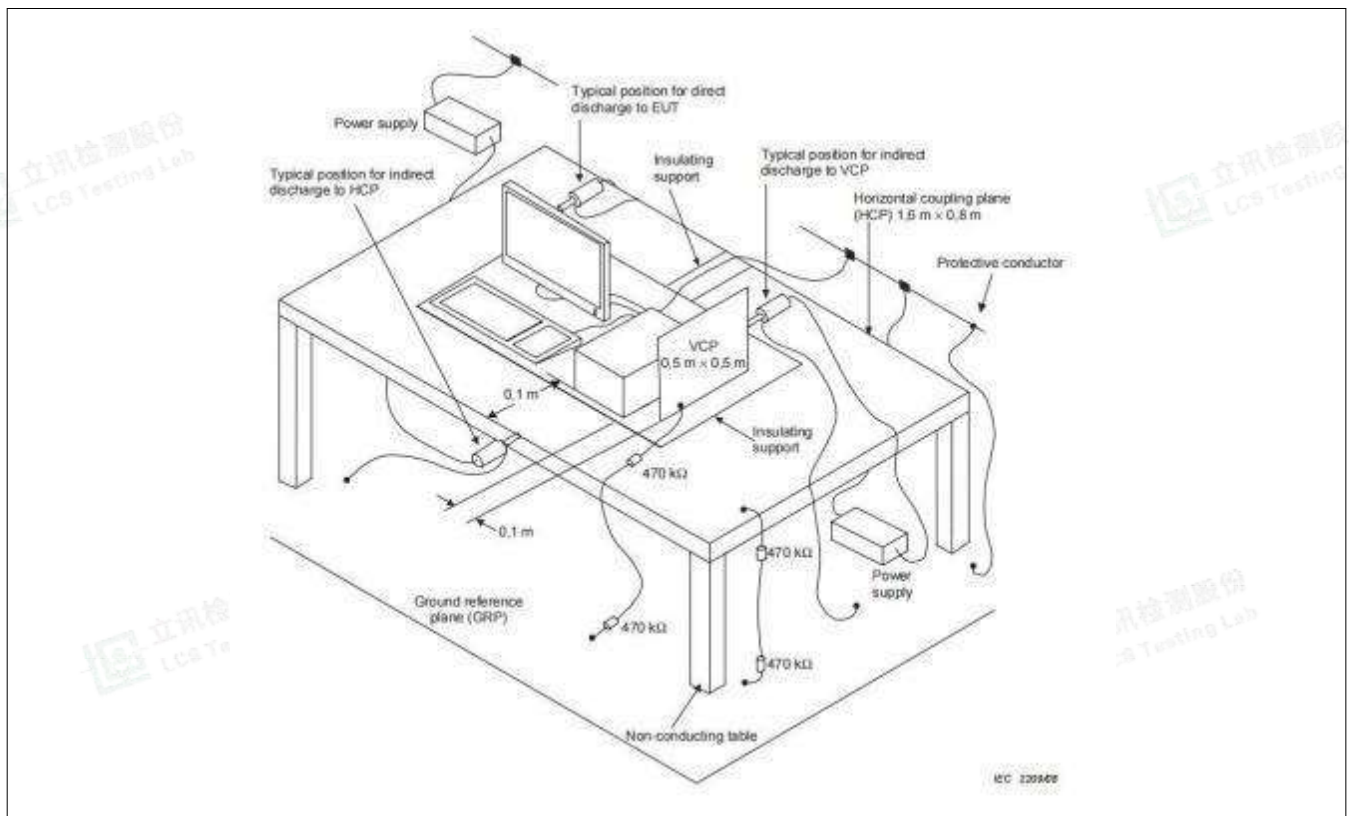

Test Results refer to Annex A. 5



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Tel: +(86) 07 55 - 82 59 13 3 0 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



6.3. RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

During the test it is verified if the EUT has sufficient immunity against radiated electromagnetic fields.


The test was carried out in a half-wave anechoic chamber with absorbent material attached to a reflective ground plate. Before the test, the test field strength needs to be calibrated. During the calibration, the corresponding relationship between the target field strength and the forward power applied to the transmitting antenna is established. During the test, except for EUT, the indoor layout is consistent with the calibration.

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

Requirements

Standard	EN 61547:2009			
Basic standard	EN 61000-4-3			
Port under test	Enclosure			
Frequency range	Test level	Modulation	Dwell time	Step size
80 - 1000 MHz	3 V/m	1 kHz, 80 % AM	N 0,5 s	≤ 1%

Test configuration

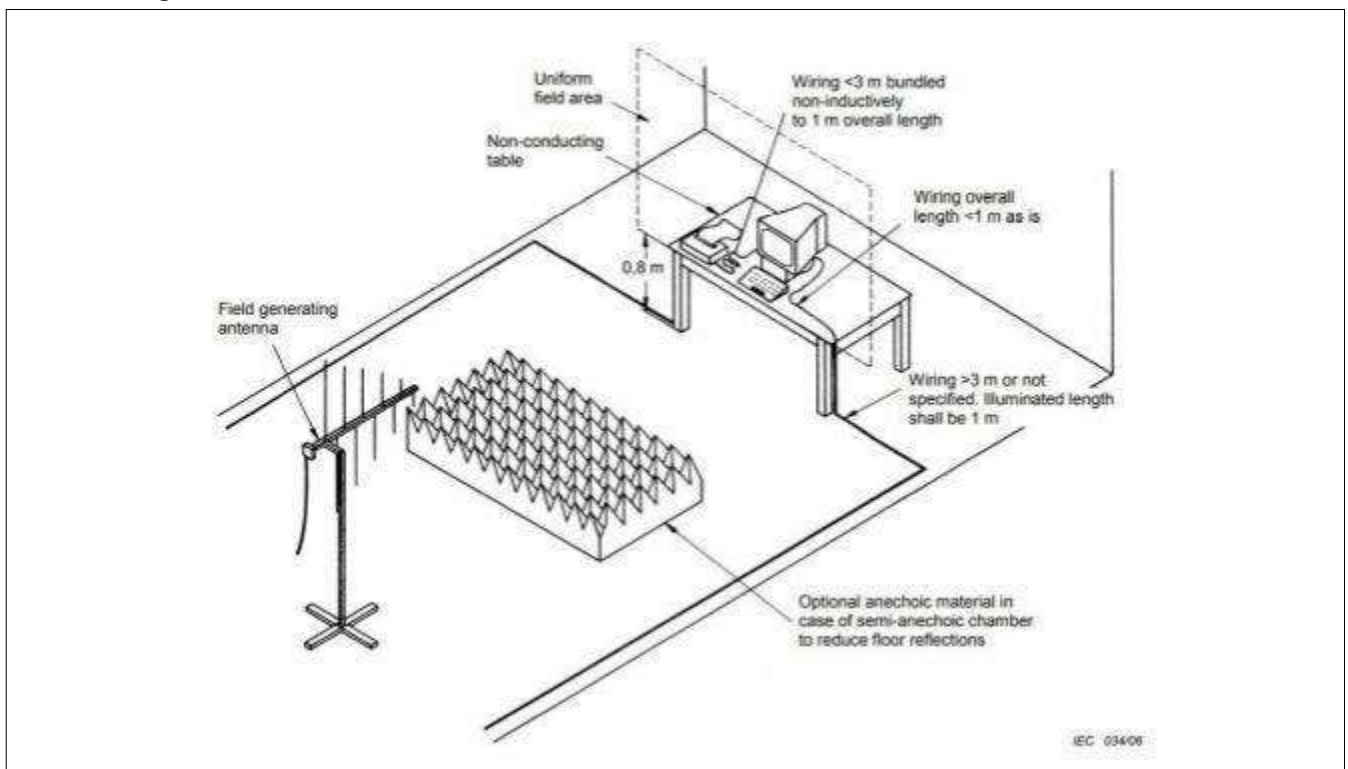

Test Results refer to Annex A. 5



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.
Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



6.4. ELECTRICAL FAST TRANSIENT / BURST

The EFT immunity test simulates the disturbances by caused of very short transient bursts.


The EUT is put on the Insulating support which is 0.1 meter high above the ground reference plane. the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5 m. both polarities of the test voltage should be applied during test, fast transients are carried out with a minimum duration of 2 min with a positive polarity and a minimum of 2 min with a negative polarity.

Requirements

Standard	EN 61547:2009			
Basic standard	EN 61000-4-4			
Pulse characteristics	5/50 ns			
Port under test		Test level	Repetition frequency	Duration
☒	AC input / output power	± 1000 V	5 kHz	2 min / polarity
☐	DC input / output power ²	± 500 V	5 kHz	2 min / polarity
☐	Signal / Control port ¹³	± 500 V	5 kHz	2 min / polarity

1) Only applicable to ports interfacing with cables whose total length may exceed 3 m.
 2) Not applicable to equipment not connected to the mains while in use.
 3) Change of state commands are not applied during the test.

Test configuration

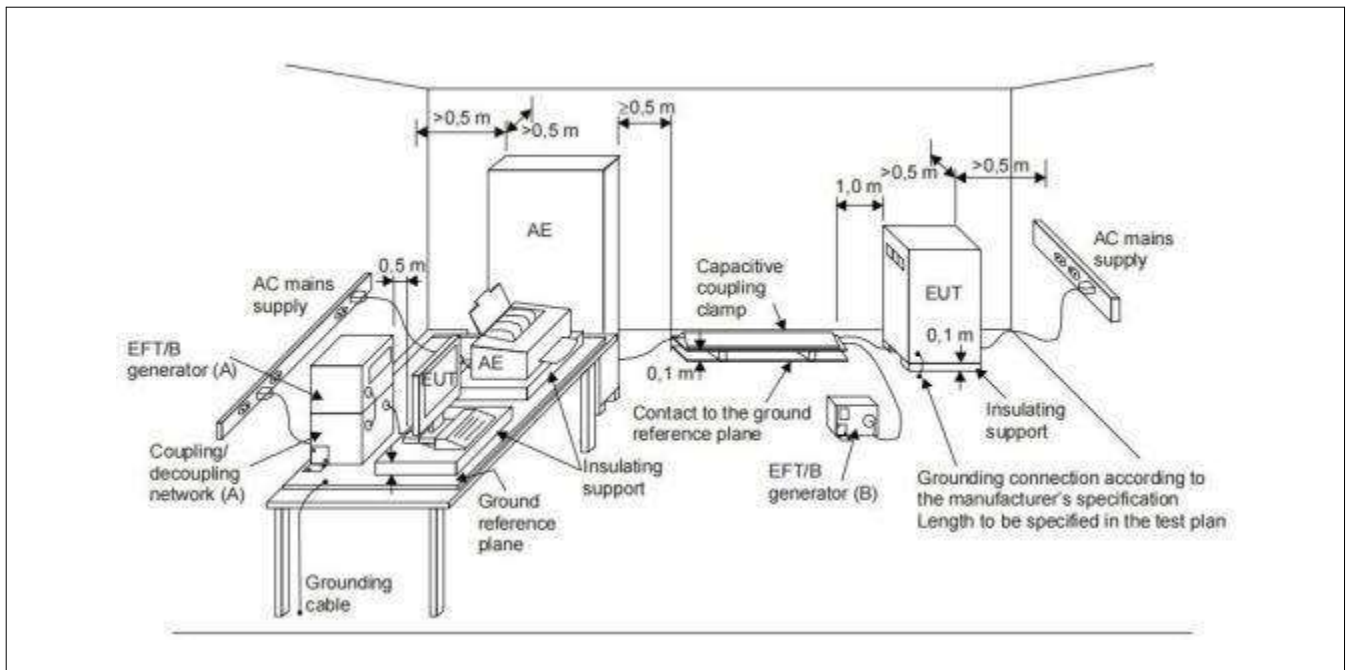

Test Results refer to Annex A. 5



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
 Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



6.5. INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

During the test the immunity of the EUT for conducted electromagnetic fields is checked .

The equipment to be tested is placed on an insulating support of $0,1\text{ m} \pm 0,05\text{ m}$ height above a reference ground plane. a non conductive roller / caster in the range of $0,1\text{ m} \pm 0,05\text{ m}$ above the reference ground plane can be used as an alternative to an insulating support. all cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. The coupling and decoupling devices shall be placed on the reference ground plane, making direct contact with it at a distance of $0,1\text{ m}$ to $0,3\text{ m}$ from the EUT.


Requirements

Standard		EN 61547:2009			
Basic standard		EN 61000-4-6			
Frequency range		0, 15 - 80 MHz			
Port under test		Test level	Modulation	Dwell time	Step size
☒	AC input / output power	3 V	1 kHz, 80 % AM	N 0,5 s	≤ 1%
☐	DC input / output power ¹	3 V	1 kHz, 80 % AM	N 0,5 s	≤ 1%
☐	Signal / Control port ²	3 V	1 kHz, 80 % AM	N 0,5 s	≤ 1%

1) Not applicable to equipment not connected to the mains while in use.

2) Only applicable to ports interfacing with cables whose whose total length may exceed 3 m.

Test configuration

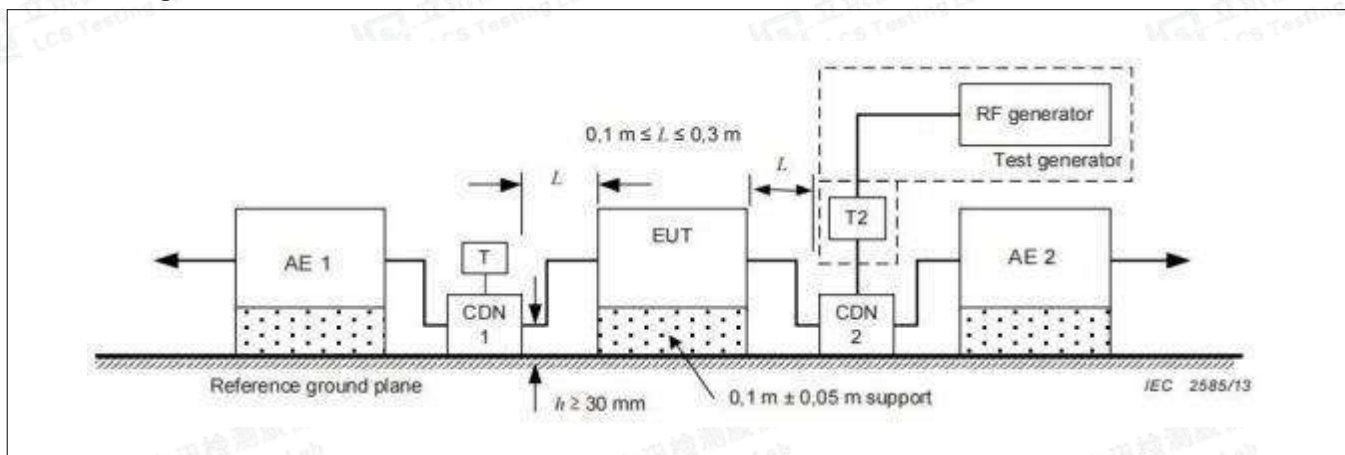

Test Results refer to Annex A. 5



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China .
Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



6.6. SURGE

The surge immunity test simulates unidirectional surges caused by overvoltages from switching and lightning transients.


The surge is applied to the EUT power supply terminal via the capacitive coupling network, to the EUT power supply provide a 1,0 kV 1,2/50 μ s voltage surge (at open-circuit condition), at least 5 positive and 5 negative tests with 1 min or less repetition rate are conducted during test. and phase angles is 90° and 270°.

Requirements

Standard		EN 61547:2009			
Basic standard		EN 61000-4-5			
Pulse wave- shape		1,2/50 μ s			
Repetition rate		1 per minute or faster			
Number of pulses		5 pulses (at each polarity and phase angles)			
Classification		Port under test	Test Level	Coupling	Phase angle
☒	Luminaires and independent auxiliaries Input power > 25 W	AC input power	+ 1 kV	line - line	90 °
			- 1 kV	line - line	270 °
		AC input power	+ 2 kV	line - ground	90 °
			- 2 kV	line - ground	270 °
☐	Luminaires and independent auxiliaries Input power $\leq$ 25 W	AC input power	+ 0,5 kV	line - line	90 °
			- 0,5 kV	line - line	270 °
		AC input power	+ 1 kV	line - ground	90 °
			- 1 kV	line - ground	270 °
☐	Self- ballasted lamps and semi- luminaires	AC input power	+ 0,5 kV	line - line	90 °
			- 0,5 kV	line - line	270 °
		AC input power	+ 1 kV	line - ground	90 °
			- 1 kV	line - ground	270 °

1) In addition to the specified test level, all lower test levels as detailed in EN 61000-4 - 5 should also be satisfied.

Test configuration

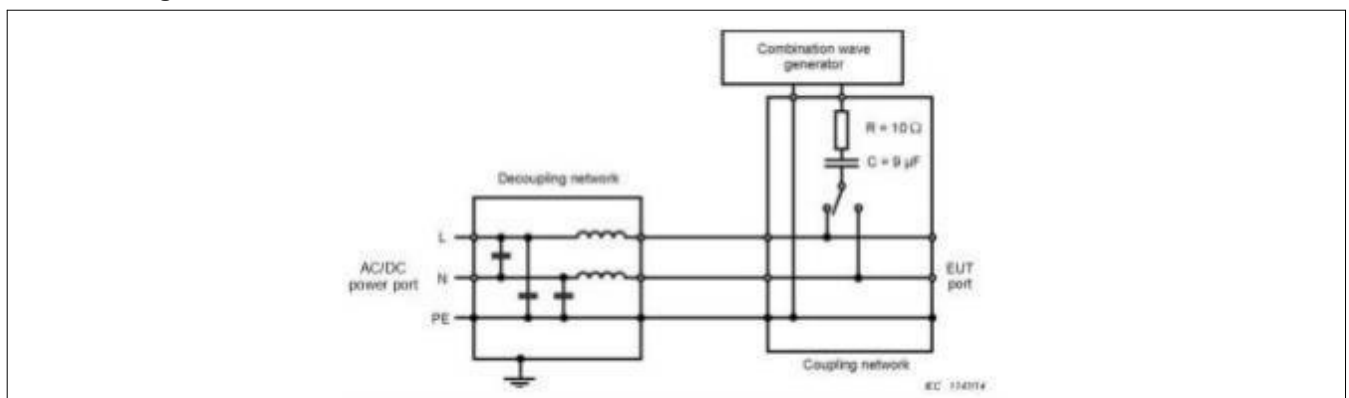

Test Results refer to Annex A. 5



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.



6.7. VOLTAGE DIPS AND SHORT INTERRUPTIONS

The surge immunity test is simulates Voltage dips and short interruptions occur due to faults in a (public or non- public) network or in installations by sudden changes of large loads.

The EUT shall be connected to the test generator for testing using the shortest power cable specified by the EUT manufacturer and, if no cable length is specified, the shortest cable suitable for the EUT, each representative mode of operation shall be tested. for short interruptions to use 0 ° for one of the phases.


Requirements

Standard	EN 61547:2009		
Basic standard	EN 61000-4- 11		
# of dips / interruptions	3 dips / interruptions for each test level and phase angle		
Intervals between events	N 10 s		
Port under test	Test level ¹	Number of periods (cycles)	
		50Hz	60Hz
AC input power	70% of U_{NOM}	10	12
	0% of U_{NOM}	0,5	0,5

1) Where the equipment has a rated voltage range the following shall apply:

- If the voltage range does not exceed 20 % of the lower voltage specified for the rated voltage range, a single voltage within that range may be specified as a basis for the test level specification.
- in all other cases, the test procedure shall be applied for both the lowest and highest voltages declared in the voltage range.

Test configuration

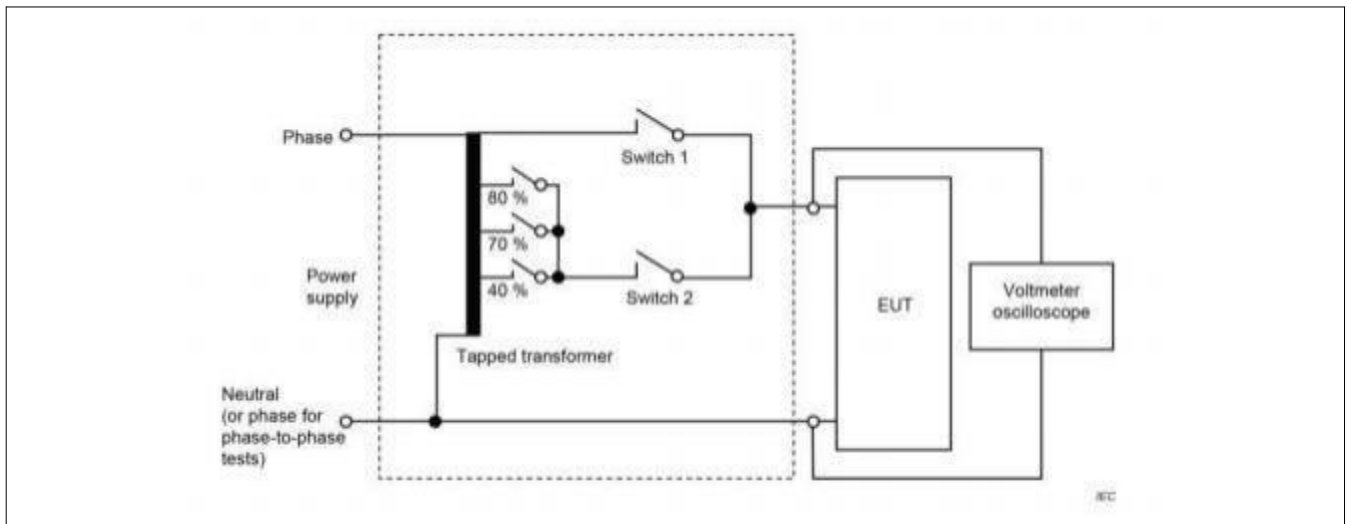

Test Results refer to Annex A. 5



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.


Scan code to check authenticity.



ANNEX A - TEST RESULTS

A.1. CONDUCTED DISTURBANCE TEST RESULTS

Environmental Conditions	23 . 9C, 56% RH
Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Line

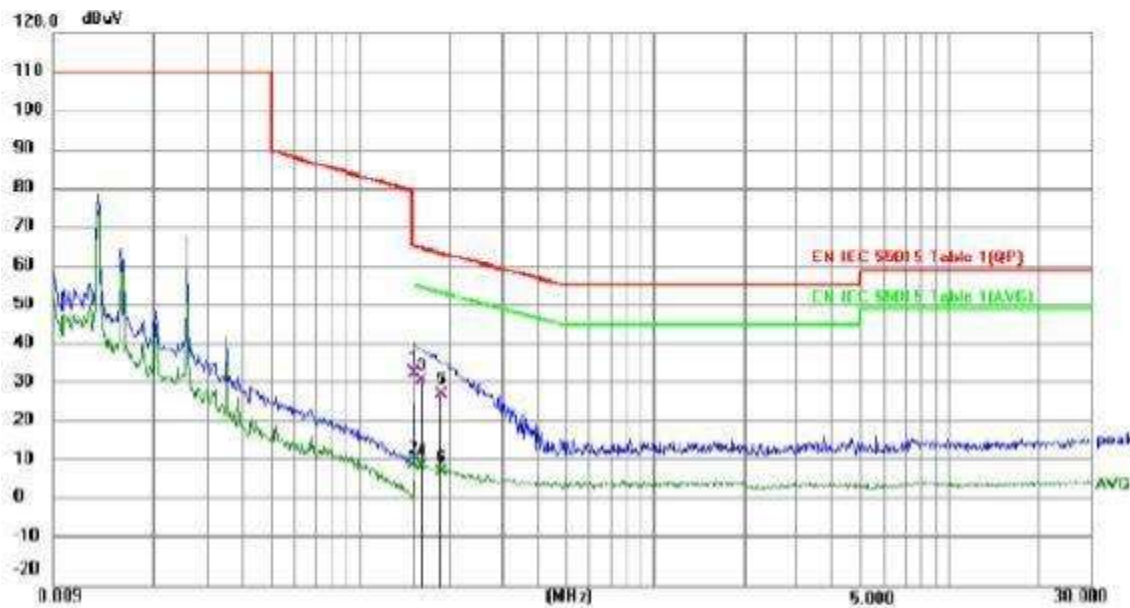


No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1505	23.35	10.24	33.59	65.97	-32.38	QP	
2		0.1505	0.57	10.24	10.81	55.97	-45.16	AVG	
3		0.1613	21.59	10.23	31.82	65.40	-33.58	QP	
4		0.1613	-0.09	10.23	10.14	55.40	-45.26	AVG	
5		0.1879	18.24	10.23	28.47	64.13	-35.66	QP	
6		0.1879	-1.27	10.23	8.96	54.13	-45.17	AVG	





Environmental Conditions	23 . 9C, 56% RH
Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Neutral

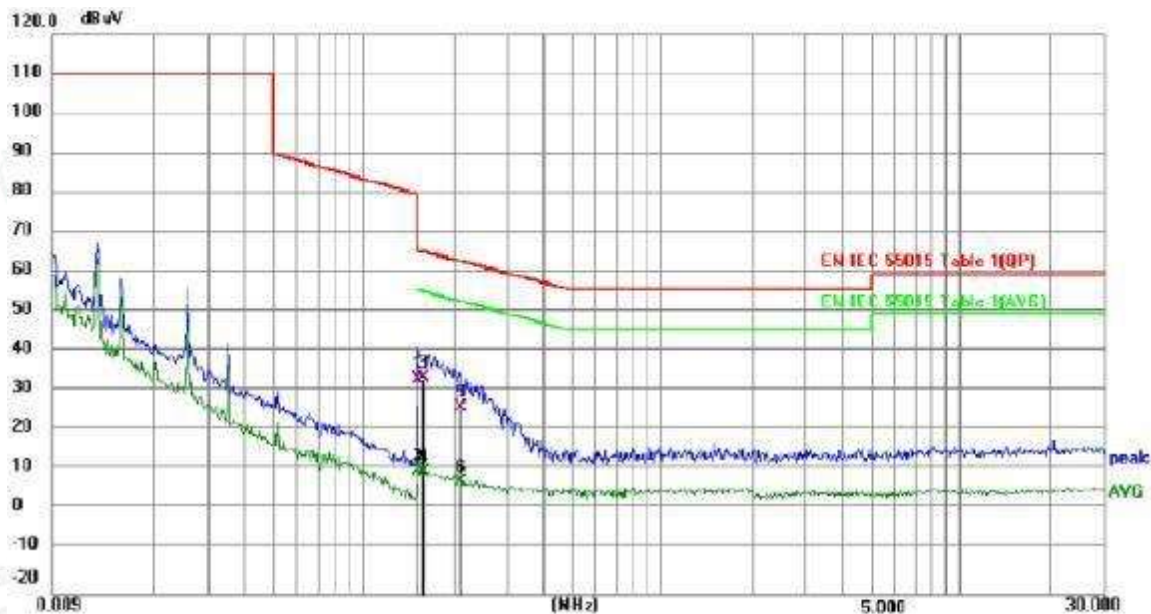


No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1508	23.38	10.24	33.62	65.96	-32.34	QP	
2		0.1508	0.62	10.24	10.86	55.96	-45.10	AVG	
3	*	0.1579	23.82	10.24	34.06	65.57	-31.51	QP	
4		0.1579	0.52	10.24	10.76	55.57	-44.81	AVG	
5		0.2107	16.52	10.22	26.74	63.18	-36.44	QP	
6		0.2107	-1.89	10.22	8.33	53.18	-44.85	AVG	





A.2. RADIATED DISTURBANCE TEST RESULTS (9kHz - 30MHz)

Environmental Conditions	23 ± 9C, 56% RH
Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	X

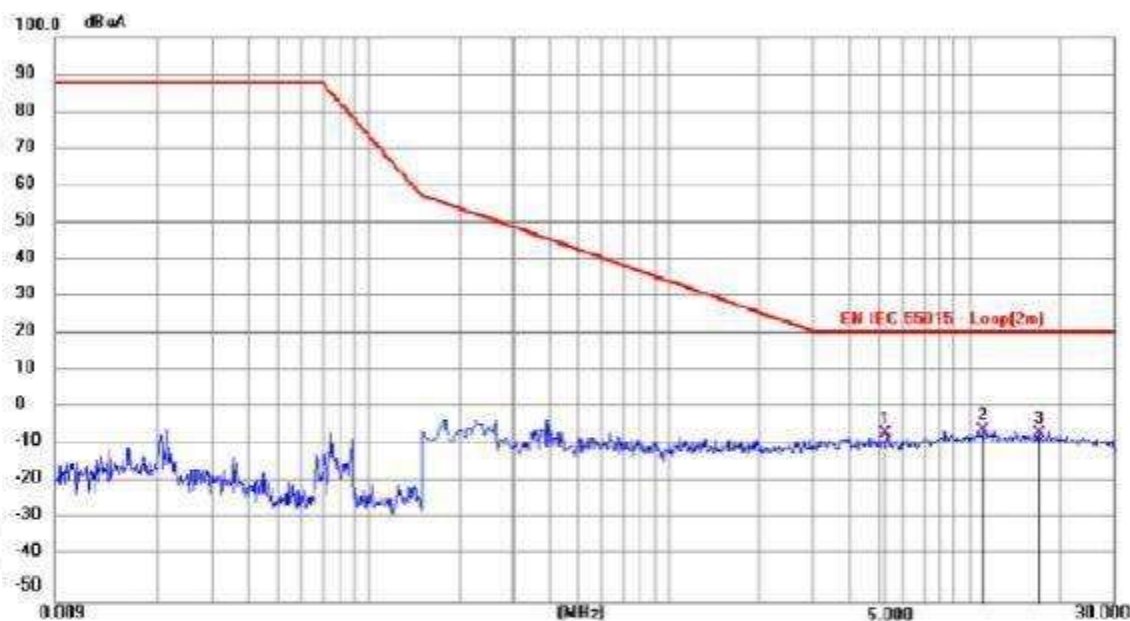

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBμV	dB	dBμA	dBμA	dB	Detector Comment
1		5.2619	-30.17	25.07	-5.10	22.00	-27.10	QP
2	*	11.1479	-30.49	26.08	-4.41	22.00	-26.41	QP
3		17.0381	-30.76	25.50	-5.26	22.00	-27.26	QP



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.


1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



Environmental Conditions	23 . 9C, 56% RH
Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Y

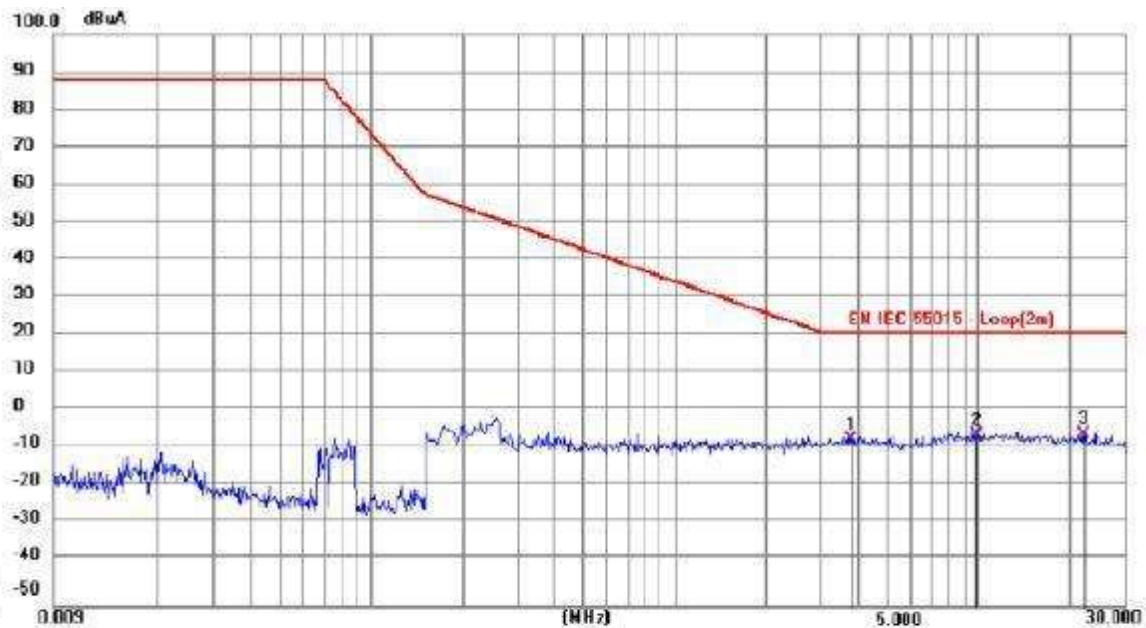

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		3.7680	-32.49	26.02	-6.47	22.00	-28.47	QP	
2		9.8655	-31.58	26.38	-5.20	22.00	-27.20	QP	
3	*	22.1955	-29.89	25.14	-4.75	22.00	-26.75	QP	



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.


1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



Environmental Conditions	23 . 9C, 56% RH
Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Z

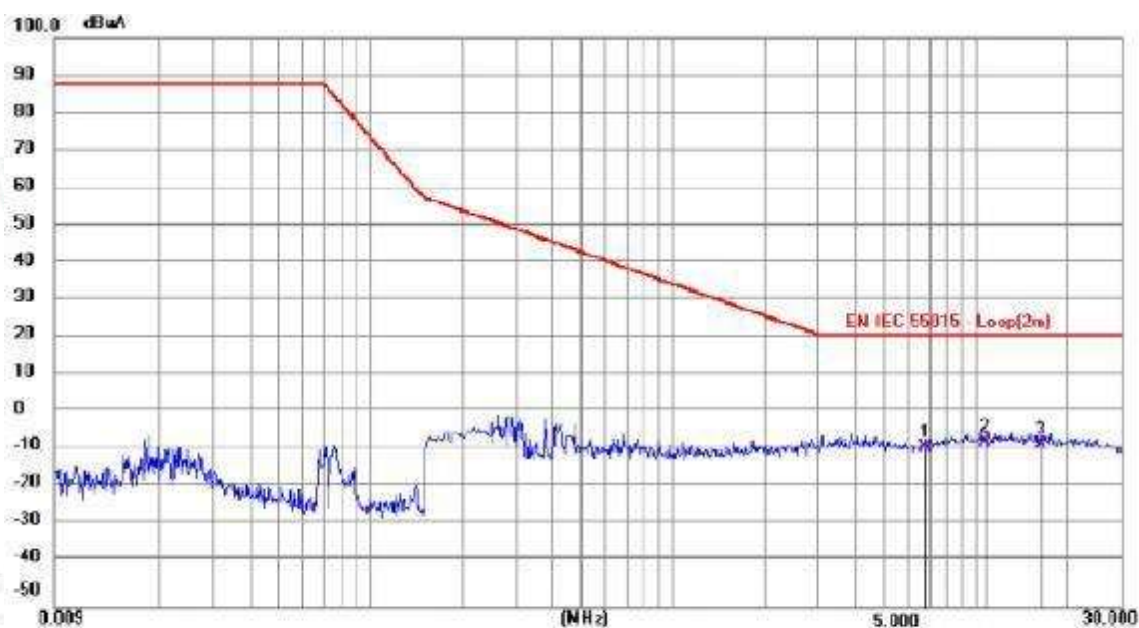

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		6.8505	-33.76	25.85	-7.91	22.00	-29.91	QP	
2	*	10.7745	-33.16	26.91	-6.25	22.00	-28.25	QP	
3		16.2870	-33.38	26.25	-7.13	22.00	-29.13	QP	



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China .


Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



A.3. RADIATED DISTURBANCE TEST RESULTS (30MHz - 1GHz)

Environmental Conditions	23 ± 2°C, 52% RH
Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Vertical

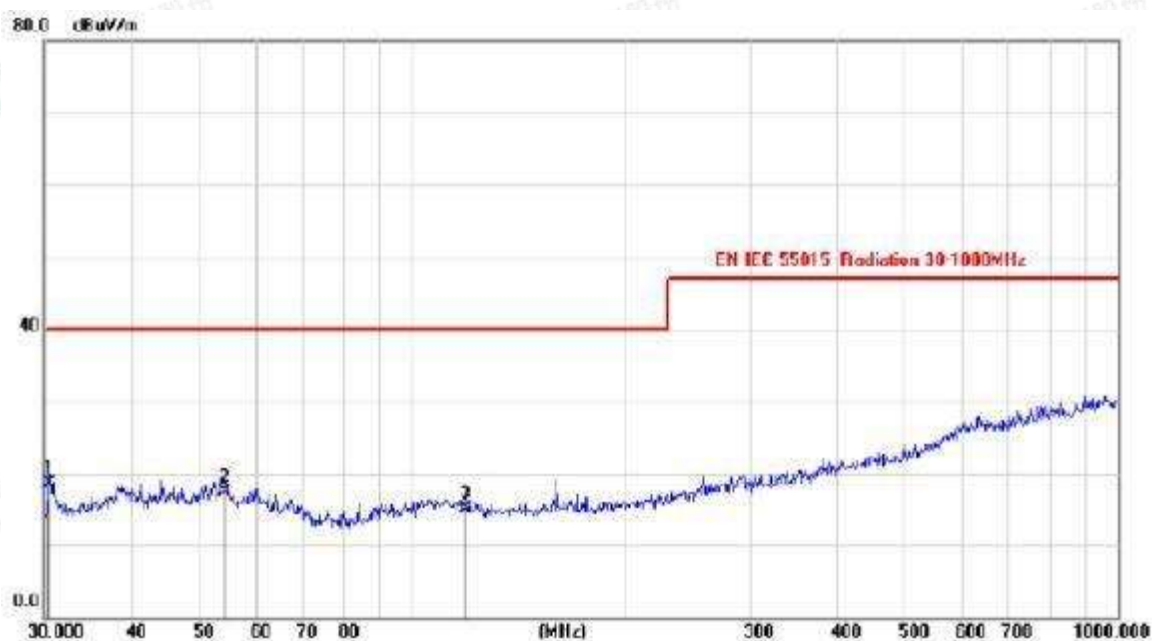

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	30.6110	7.98	10.50	18.48	40.00	-21.52	QP			
2		54.2848	5.02	12.20	17.22	40.00	-22.78	QP			
3		119.0180	3.26	11.56	14.82	40.00	-25.18	QP			



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.


1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



Environmental Conditions	23 ± 2°C, 52% RH
Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Horizontal

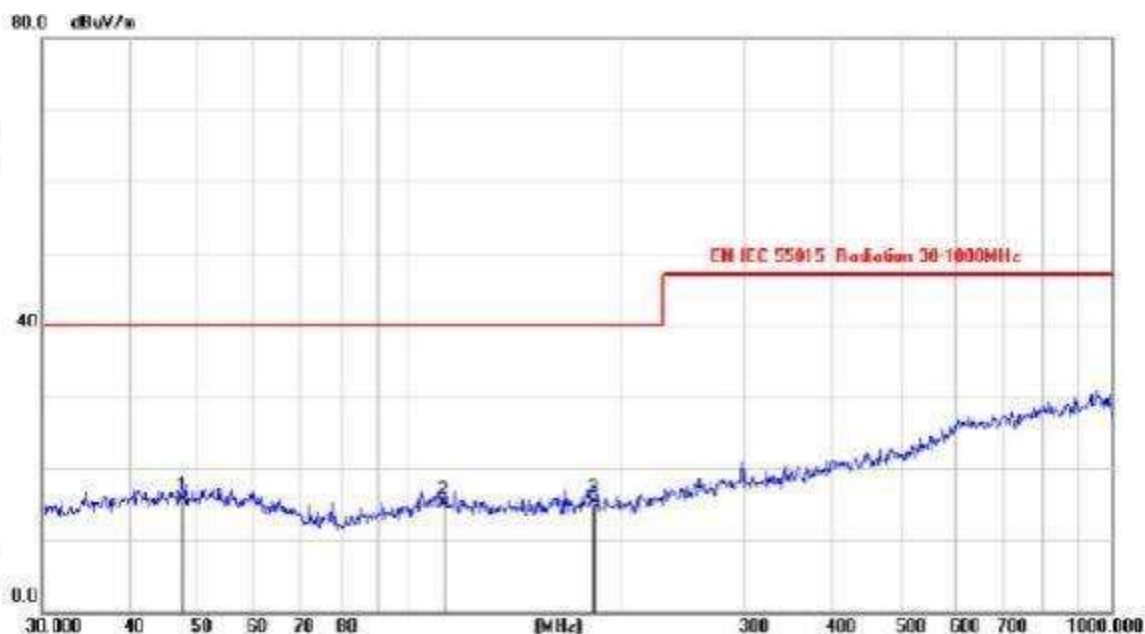

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	47.6168	2.85	12.66	15.51	40.00	-24.49	QP		
2		111.7869	2.68	12.27	14.95	40.00	-25.05	QP		
3		183.0399	4.10	10.95	15.05	40.00	-24.95	QP		



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.
Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.


Scan code to check authenticity.




A.4. HARMONIC CURRENT TEST RESULTS

Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong

Test Result: **Pass** Source qualification(Power On Load): **Idle - Pass**
Current & voltage waveforms

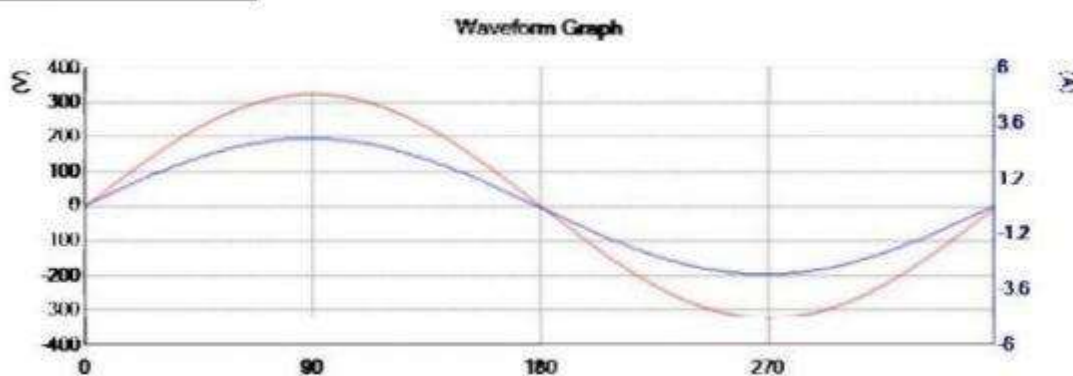

Harmonics and Class C limit line (>25W)

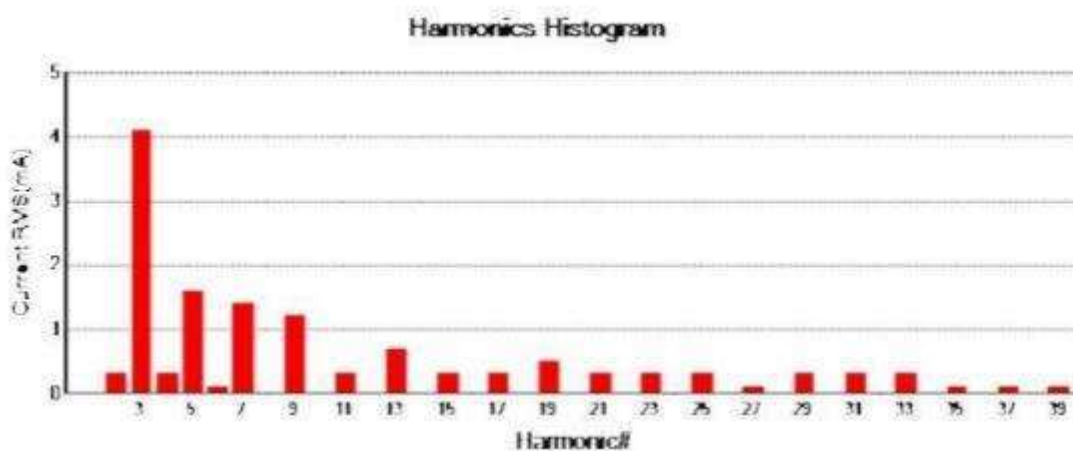

Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong

Test Result: **Pass** Source qualification(Power On Load): **Idle - Pass**
 THC(mA): 5.000 I - THD(%): 0.2 POHC(mA):1.000 POHC Limit(mA):198.142

Parameter values during test:
 V RMS (Volts): 229.9 Frequency(Hz): 50.0
 I RMS (A): 2.1 Crest Factor: 1.413
 Power (Watts): 480.3 Power Factor: 1.000

Harm#	Harms(filtered) (mA)	Limit (mA)	Harms(avg) (mA)	100%Limit	Harms(max) (mA)	150%Limit	Status
I Fund	2088.600						
2	0.300	41.772	0.600	1.436	0.800	1.277	Pass
3	4.100	563.922	4.100	0.727	4.400	0.520	Pass
4	0.100	-	0.400	-	0.500	-	N/A
5	1.600	208.860	1.700	0.814	1.900	0.606	Pass
6	0.100	-	0.200	-	0.300	-	N/A
7	1.400	146.202	1.500	1.026	1.600	0.730	Pass
8	0.100	-	0.100	-	0.100	-	N/A
9	1.000	104.430	1.100	1.053	1.200	0.766	Pass
10	0.100	-	0.100	-	0.100	-	N/A
11	0.500	62.658	0.500	0.798	0.700	0.745	Pass
12	0.000	-	0.100	-	0.100	-	N/A
13	0.700	62.658	0.600	0.958	0.700	0.745	Pass
14	0.000	-	0.000	-	0.000	-	N/A
15	0.500	62.658	0.500	0.798	0.500	0.532	Pass
16	0.000	-	0.100	-	0.100	-	N/A
17	0.300	62.658	0.400	0.638	0.300	0.319	Pass
18	0.000	-	0.000	-	0.000	-	N/A
19	0.500	62.658	0.500	0.798	0.500	0.532	Pass
20	0.000	-	0.000	-	0.000	-	N/A
21	0.500	62.658	0.500	0.798	0.500	0.532	Pass
22	0.000	-	0.000	-	0.000	-	N/A
23	0.300	62.658	0.300	0.479	0.300	0.319	Pass
24	0.000	-	0.000	-	0.000	-	N/A
25	0.300	62.658	0.300	0.479	0.300	0.319	Pass
26	0.000	-	0.000	-	0.000	-	N/A
27	0.100	62.658	0.300	0.479	0.300	0.319	Pass
28	0.000	-	0.000	-	0.000	-	N/A
29	0.300	62.658	0.300	0.479	0.300	0.319	Pass
30	0.000	-	0.000	-	0.000	-	N/A
31	0.300	62.658	0.300	0.479	0.300	0.319	Pass
32	0.000	-	0.000	-	0.000	-	N/A
33	0.300	62.658	0.300	0.479	0.300	0.319	Pass
34	0.000	-	0.000	-	0.000	-	N/A
35	0.100	62.658	0.300	0.479	0.300	0.319	Pass
36	0.000	-	0.000	-	0.000	-	N/A
37	0.100	62.658	0.300	0.479	0.300	0.319	Pass
38	0.000	-	0.000	-	0.000	-	N/A
39	0.100	62.658	0.200	0.319	0.300	0.319	Pass
40	0.000	-	0.000	-	0.000	-	N/A

Note: All harmonics are below the minimum limits and are ignored.



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China .

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



Model	Light- Control Sensor (Photocell)
Operating mode	Mode 1
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong

Source qualification(Power On Load): **Pass**

Measurements are compliant with IEC/EN61000-3-2 Ed. 4 & IEC/EN61000-4-7 Ed. 2.1

	Nominal	Measured	Measured	Deviation	Allowed	Result
		Low	High		Deviation	
Supply Voltage	230	229.82	229.92	0.18	4.6	Pass
Supply Frequency	50	50.0	50.0	0.0	0.25	Pass
Crest Phase	90.0	89.7	89.9	0.3	87 - 93	Pass
Crest Factor	1.414	1.414	1.415	0.001	1.40 - 1.42	Pass
Fundamental Voltage	229.86	-	-	-	-	-

Harm#	Harmonics Voltage	Harmonic Ratio	Limit	Result
2	0.040	0.039	0.200	Pass
3	0.150	0.081	0.900	Pass
4	0.020	0.029	0.200	Pass
5	0.010	0.027	0.400	Pass
6	0.020	0.013	0.200	Pass
7	0.020	0.017	0.300	Pass
8	0.010	0.006	0.200	Pass
9	0.010	0.006	0.200	Pass
10	0.020	0.009	0.100	Pass
11	0.020	0.015	0.100	Pass
12	0.000	0.003	0.100	Pass
13	0.010	0.008	0.100	Pass
14	0.000	0.000	0.100	Pass
15	0.010	0.005	0.100	Pass
16	0.000	0.003	0.100	Pass
17	0.000	0.004	0.100	Pass
18	0.000	0.003	0.100	Pass
19	0.000	0.003	0.100	Pass
20	0.000	0.000	0.100	Pass
21	0.000	0.005	0.100	Pass
22	0.000	0.000	0.100	Pass
23	0.000	0.003	0.100	Pass
24	0.000	0.000	0.100	Pass
25	0.000	0.003	0.100	Pass
26	0.000	0.000	0.100	Pass
27	0.000	0.003	0.100	Pass
28	0.000	0.000	0.100	Pass
29	0.000	0.003	0.100	Pass
30	0.000	0.000	0.100	Pass
31	0.000	0.003	0.100	Pass
32	0.000	0.000	0.100	Pass
33	0.000	0.000	0.100	Pass
34	0.000	0.000	0.100	Pass
35	0.000	0.003	0.100	Pass
36	0.000	0.000	0.100	Pass
37	0.000	0.000	0.100	Pass
38	0.000	0.000	0.100	Pass
39	0.000	0.000	0.100	Pass
40	0.000	0.000	0.100	Pass



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



A.5. IMMUNITY TEST RESULTS

ELECTROSTATIC DISCHARGE IMMUNITY TEST RESULTS					
Standard	☒ EN 61547:2009		☒ EN 61000-4-2		
EUT	Infrared Motion Sensor		Temperature	24.7℃	
M/N	Light-Control Sensor (Photocell)		Humidity	52%	
Test Mode	MODE 1		Pressure	1008mbar	
Input voltage	AC 230V,50Hz		Test Results	Pass	
Test engineer	Peng Dong				
Discharge Mode	Test Points	Test Voltage (kV) & polarity	Number of discharges/ polarity	Discharge interval (s)	Performance Criteria
Contact Discharge	-	± 2&4	10	1	B
Air Discharge	-	± 2&4&8	10	1	B
VCP	-	± 4	10	1	B
HCP	-	± 4	10	1	B
Note:					



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



RADIO-FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST RESULTS

Standard	☒ EN 61547:2009		☒ EN 61000-4-3	
EUT	Infrared Motion Sensor	Temperature	23.8C	
M/N	Light-Control Sensor (Photocell)	Humidity	54%	
Test Mode	MODE 1	Pressure	1008mbar	
Input voltage	AC 230V,50Hz	Test engineer	Baron wen	
Modulation	1 kHz, 80 % AM	Test Results	Pass	
Steps	1%			
Angle of EUT	Antenna polarization	Frequency Range	Test Level	Performance Criteria
0 °	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
90 °	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
180°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
270°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A

Note :



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community , Matian Street, Guangming District, Shenzhen , China.
Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST RESULTS

Standard	☒ EN 61547:2009		☒ EN 61000-4-4	
EUT	Infrared Motion Sensor		Temperature	24.3C
M/N	Light-Control Sensor (Photocell)		Humidity	52%
Test Mode	MODE 1		Pressure	1008mbar
Input voltage	AC 230V,50Hz		Test Results	Pass
Test engineer	Peng Dong			
Port under test	Test Level & polarity	Repetition Frequency	Test duration / polarity	Performance Criteria
AC Input / Output Power	± 1 kV	5 kHz	2min	B
DC Input / Output Power				
Signal / Control Port				

Note:



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China .
Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE) TEST RESULTS

Standard	☒ EN 61547:2009		☒ EN 61000-4-6	
EUT	Infrared Motion Sensor	Temperature	24.3℃	
M/N	Light-Control Sensor (Photocell)	Humidity	52%	
Test Mode	MODE 1	Pressure	1008mbar	
Input voltage	AC 230V,50Hz	Test Results	Pass	
Frequency range	0, 15 - 80 MHz	Test engineer	Peng Dong	
Port under test	Test Level	Coupling method	Dwell time	Performance Criteria
AC Input / Output Power	3 V	CDN	3 seconds	A
DC Input / Output Power				
Signal / Control Port				



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.
Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



SURGE IMMUNITY TEST RESULTS

Standard	☒ EN 61547:2009			☒ EN 61000-4-5		
EUT	Infrared Motion Sensor			Temperature	24.3C	
M/N	Light-Control Sensor (Photocell)			Humidity	52%	
Test Mode	MODE 1			Pressure	1008mbar	
Input voltage	AC 230V,50Hz			Test Results	Pass	
Test engineer	Peng Dong					
Port under test	Coupling	Test Level & polarity(kV)	Phase angle (°)	Number of surges	Repetition rate(s)	Performance criteria
AC Input power	L - N	+ 1	90	5	60	C
		- 1	270	5	60	C
AC Input power	L - PE					
AC Input power	N - PE					
AC Input power	L&N - PE					

Note:



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China .

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY TEST RESULTS

Standard	☒ EN 61547:2009			☒ EN 61000-4- 11	
EUT	Infrared Motion Sensor			Temperature	24.3C
M/N	Light-Control Sensor (Photocell)			Humidity	52%
Test Mode	MODE 1			Pressure	1008mbar
Input voltage	AC 230V,50Hz			Test Results	Pass
Test engineer	Peng Dong				
U _{NOM} (Vac)	Test Level (% U _{NOM})	Number of periods		Phase angle (°)	Performance criteria
		50Hz	60Hz		
230	70	10	12	0, 90, 180, 270	C
230	0	0,5	0,5	0	B

Note:



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China.

Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail:webmaster@lcs-cert.com| Web:www. lcs-cert.com.

Scan code to check authenticity.



ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT

The photographs show the equipment under test.

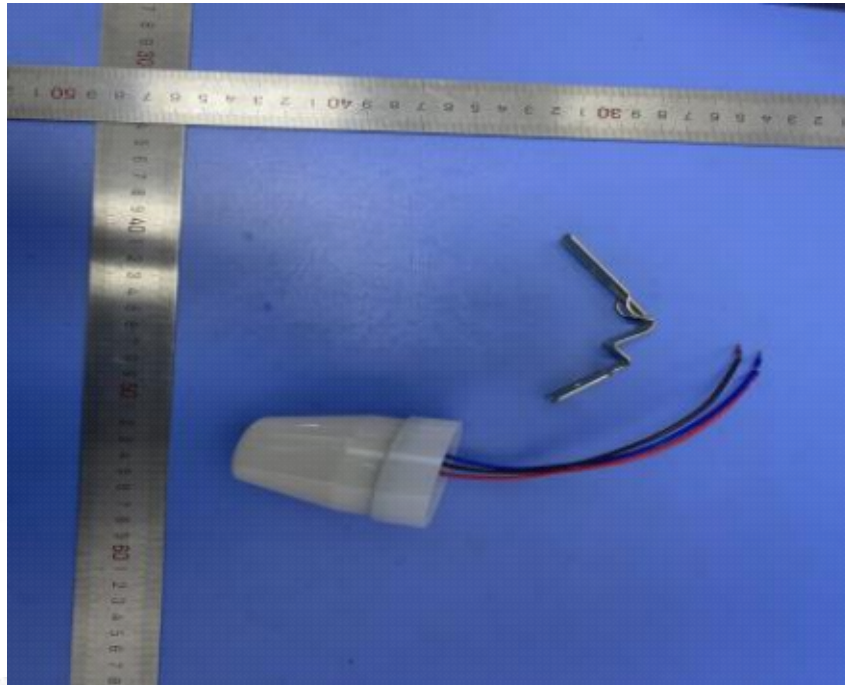


Figure. 1 (Light- Control Sensor (Photocell))



Figure. 2



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building , Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(8 6) 07 55 - 8 2 59 13 3 0 | E- mail:webmaster@lcs-cert. com| Web:www.lcs-cert. com.

Scan code to check authenticity.



Figure. 3

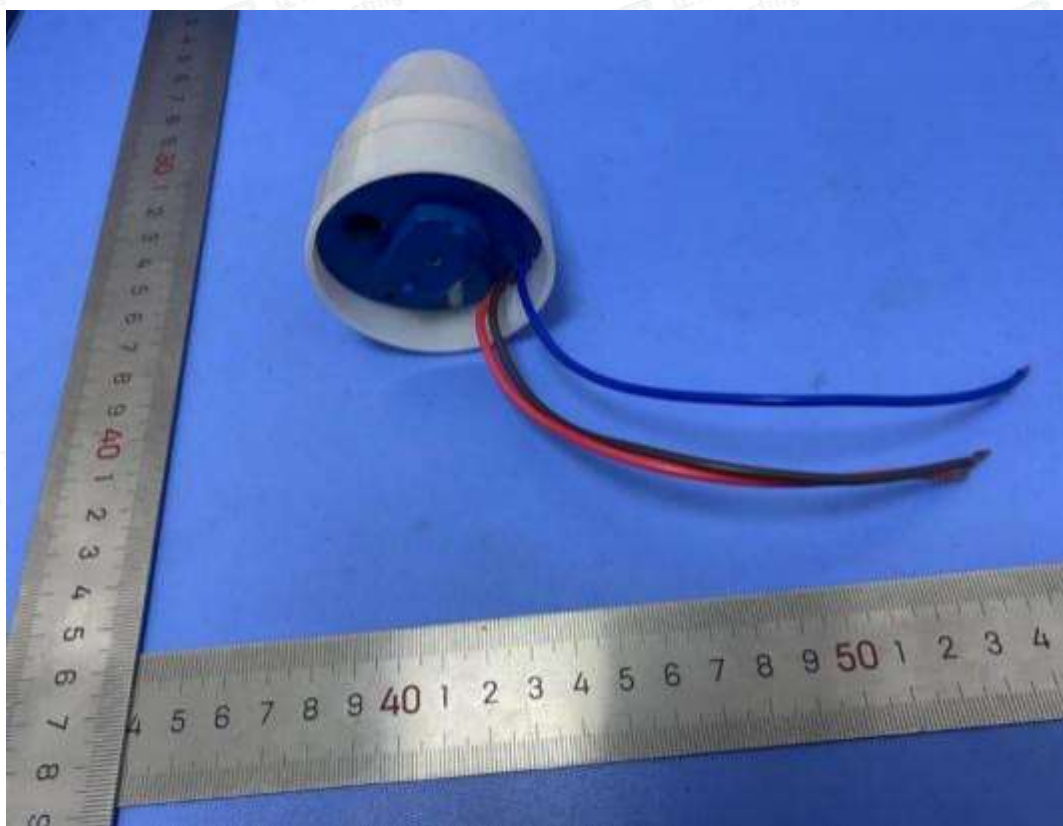


Figure. 4



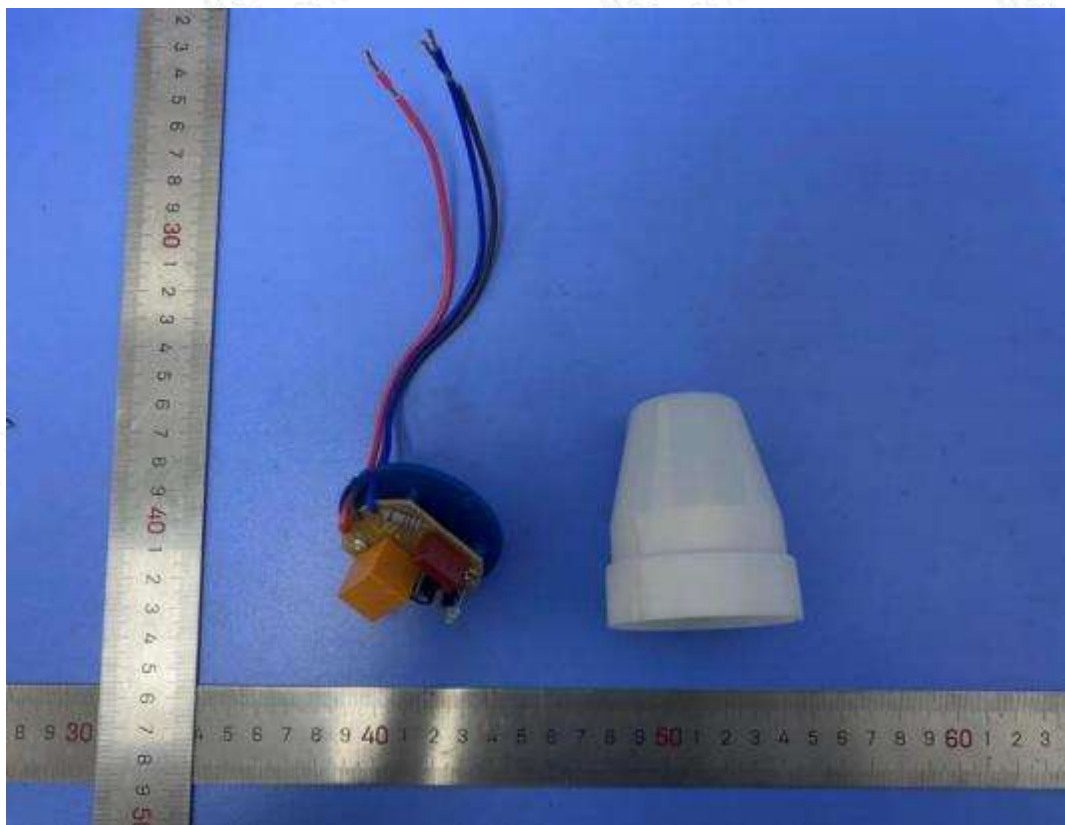


Figure. 5

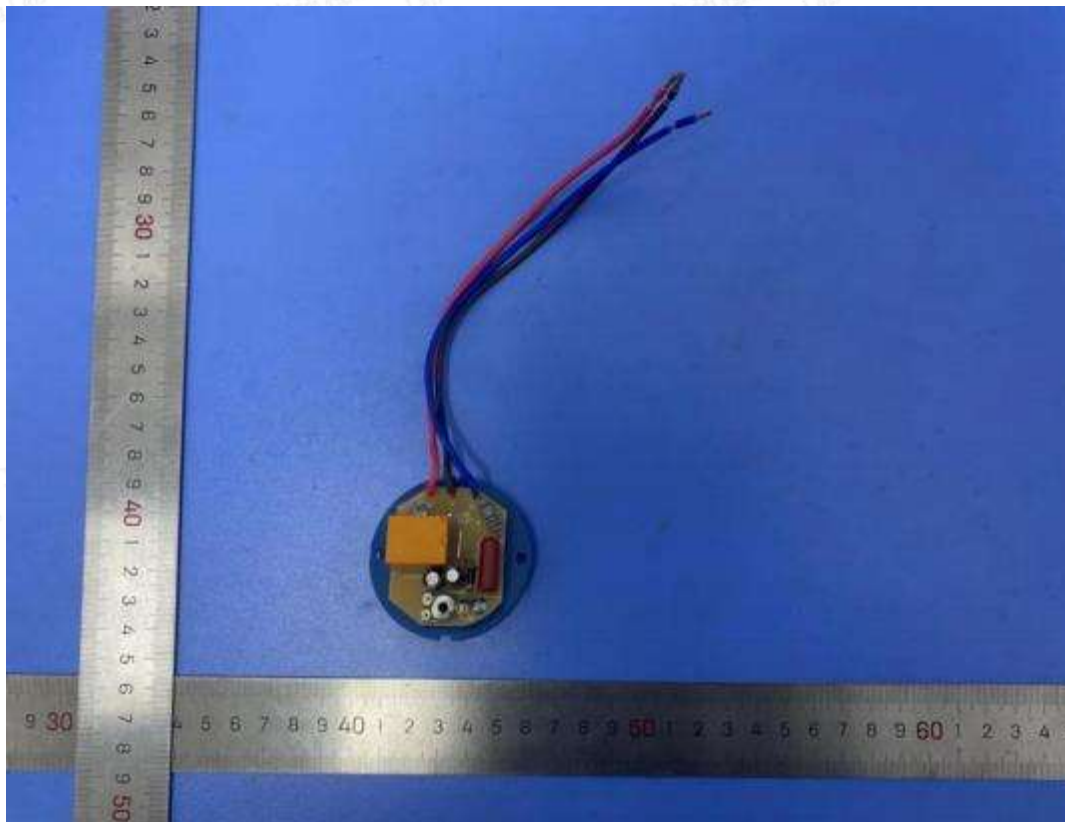


Figure. 6



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China

Tel: +(86) 0755 - 8 259133 0 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.

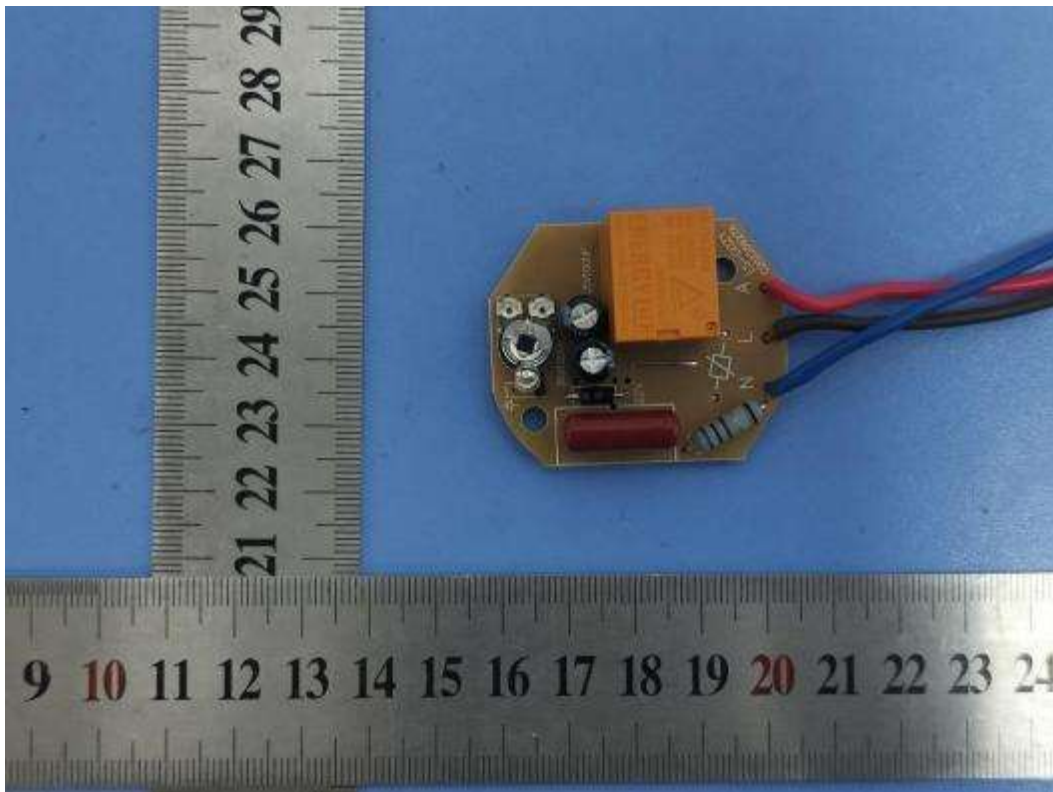


Figure. 7

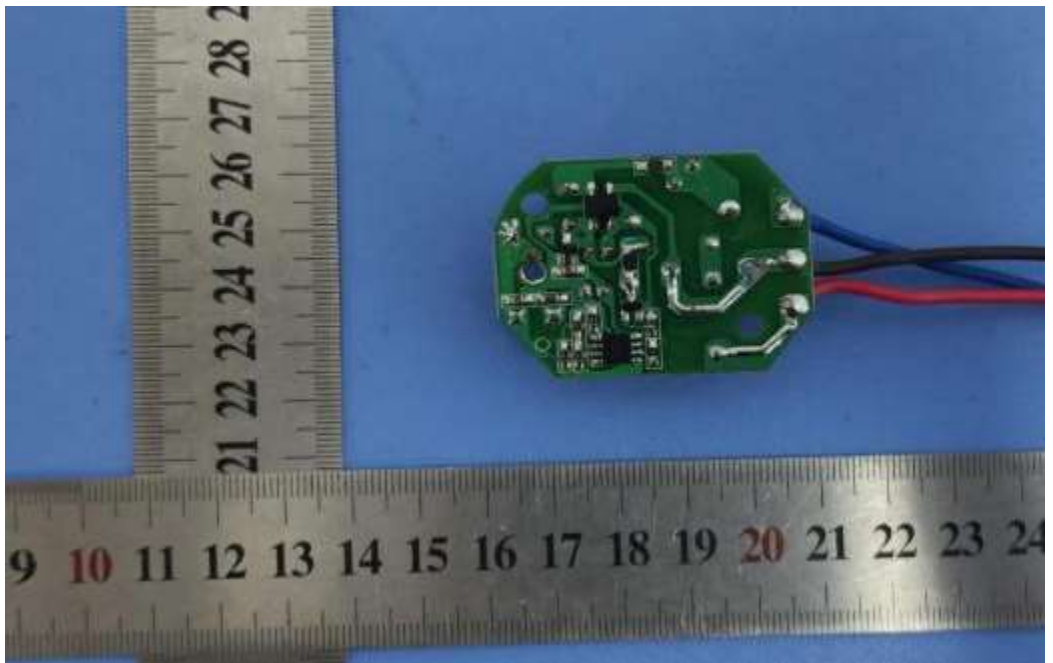


Figure. 8



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China. Tel: +(8 6) 07 55 - 82 59 13 3 0 | E- mail: webmaster@lcs-cert.com| Web: www.lcs-cert.com.

Scan code to check authenticity.

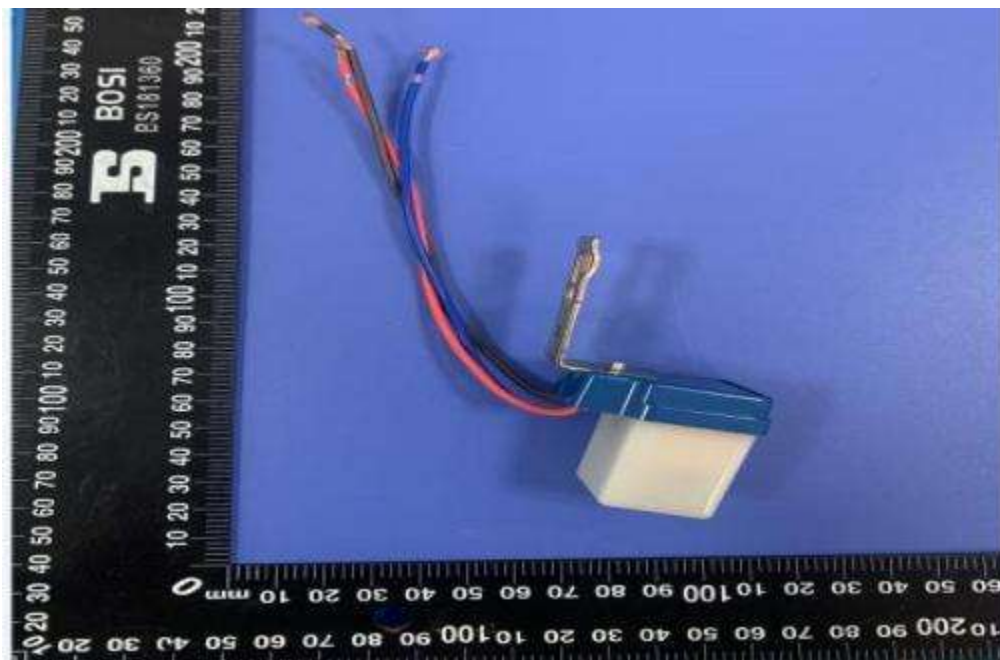


Figure. 9

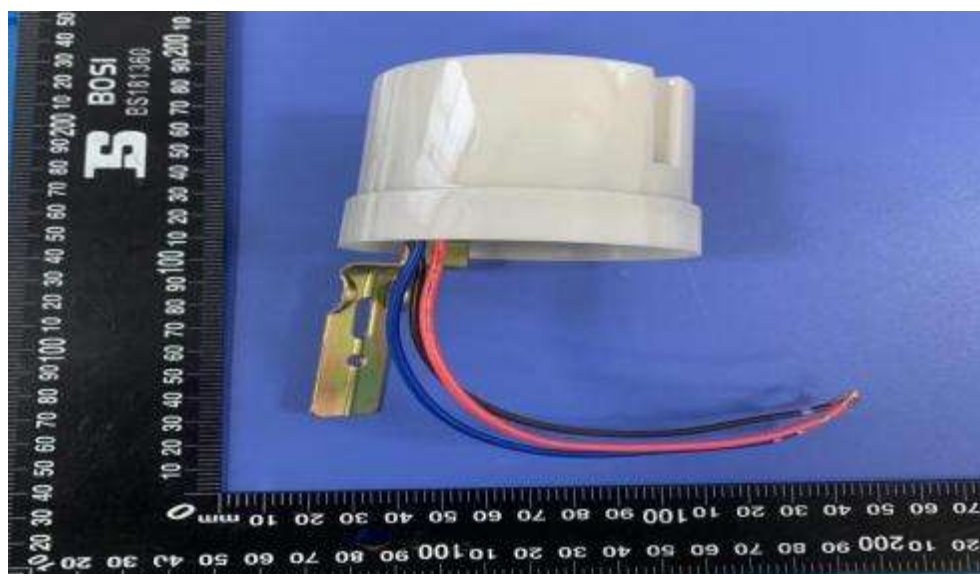


Figure. 10



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 0 1 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China .

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.

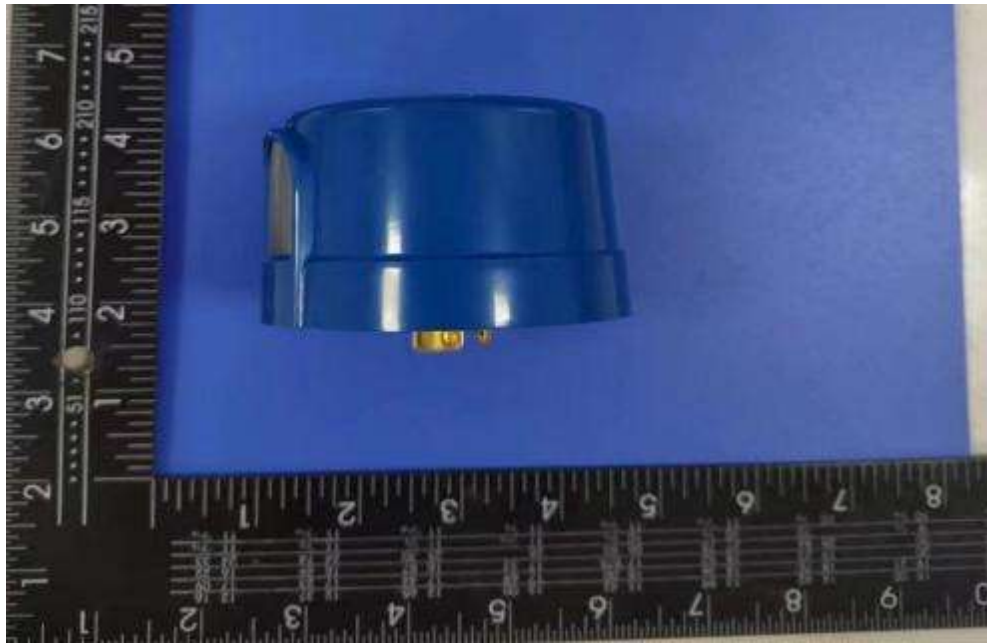


Figure. 1 1



Figure . 12



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 01 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China. Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert.com.

Scan code to check authenticity



Figure. 13

----- END-----



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

1 0 1 - 2 0 1 , No. 39 Building, Xialang Industrial Zone , Heshuikou Community, Matian Street, Guangming District, Shenzhen , China .

Tel: +(8 6) 075 5 - 8 25 9 13 30 | E- mail:webmaster@lcs-cert.com| Web:www.lcs-cert. com.

Scan code to check authenticity.